Verbatim LED Panel 40W 4000K 4000lm 625x625 PRISM

- Energy efficient alternative to Fluorescent Panels
- 50 000 hours lifetime
- Light output of 4000lm
- 4000K neutral white light
- flicker-free driver
- UGR<19







Product Number	52249
General Data	
Installation Type	Recessed
Housing material	Aluminium / PS Diffuser
Housing colour	White
Protection class	IP20
Dimmable	no
Geometric Data	
Length (mm)	622
Height (mm)	12.5
Width (mm)	622
Weight (g)	3200
Electric Data	
Wattage (W)	40
Voltage (V)	200 - 240
Current (mA)	190
Power Factor	>0.9
Operating Frequency (Hz)	50/60
Safety Class	Class III
Power supply	External (not included)
Photometric Data	
Luminous Flux (lm)	4000
CRI	80
CCT (K)	4000
Luminous Efficacy (lm/W)	100
Luminous Intensity (cd)	1450
UGR	<19
Lifespan	
Lifetime (hrs)	50,000
Switching Cycle	100,000
Mechanical Parameters	
Glow wire test	650°C

E1703

29/04/2016

Lifestyle image



Technical Drawings

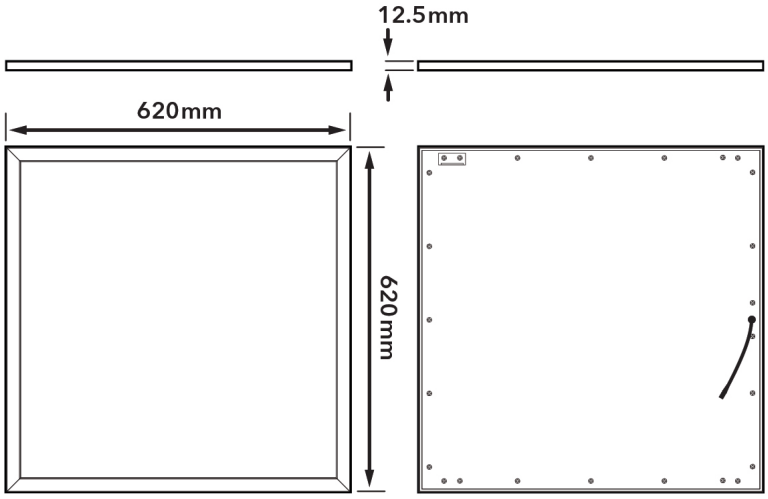

29/04/2016

Energy Rating

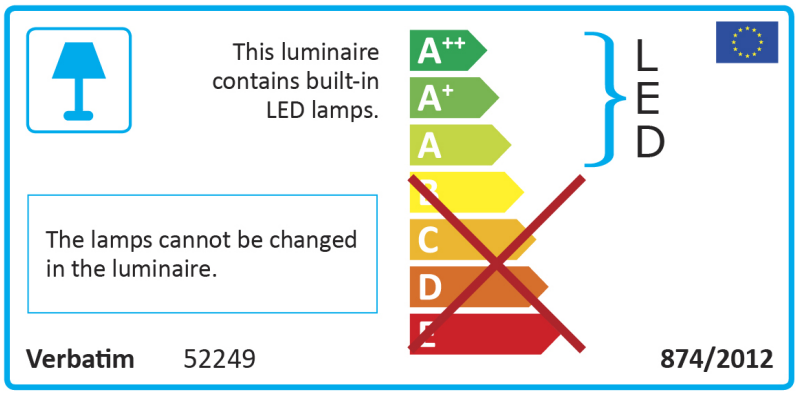

Technical Packaging Details

Barcode
20023942522496

EAN 128
(02)00023942522492(37)04(91)823

EAN 14
50023942522497

Pack Dimensions(HxWxL)
40 x 670 x670 (mm)

Pack Weight
3700 (g)

MOQ
1

Carton Dimensions (HxWxL)
185 x 690 x 690 (mm)

Cartons/Pallet
10

Layers/Pallet
5

Units/Pallet
40

Photometric Diagrams

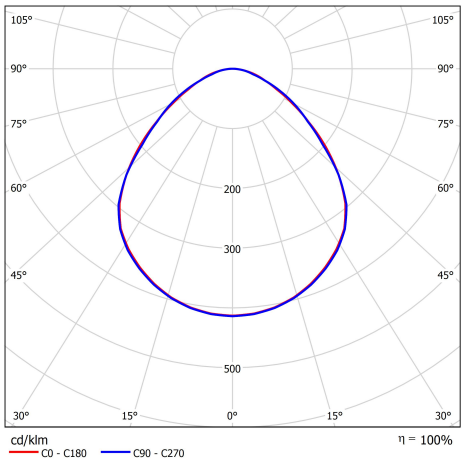

29/04/2016