MAXHUB



UC M40

360° All-in-one Panoramic Camera

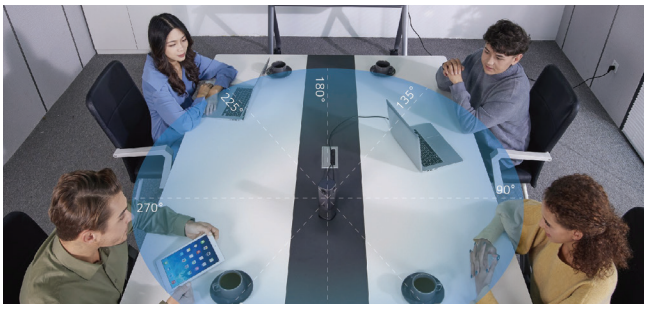

Panoramic 360° Coverage

Even if you're seated to the side, you'll be front and center on the screen. The UC M40's 4-lens 360° super wide-angle camera captures every participant's face, without fish-eye distortion.



Intelligent Speaker Tracking

For effortless meetings, Speaker Tracking automatically shifts the camera's focus to the speaker. The UC M40 tracks every face and follows every word for a captivating meeting experience.



Choose Settings With One Tap

Choose from Standalone mode, for meetings right out of the box, or Professional mode, for a wide variety of settings from camera angles to custom display and auto-framing settings.



Portable All-In-One BYOD

The UC M40 is a portable, all-in-one meeting solution, small enough to carry in one hand. It combines a 360° camera, speakers, and voice-tracking mics in an easy-to-use design.

Specifications

CAMERA

Camera	4 x 140°
Sensor	1/2.7" CMOS
Pixels	5 MP
Aperture	2.5
Frame Rates	4992 x 928 @30fps
	1920 x 1080 @30fps
	1280 x 720 @30fps
Max Frame Rate	2560 x 1444 @30fps
FOV	40°(D), 111°(H), 85°(V)
Video Format	MJPG/YUY2

MICROPHONES

Quantity	4 Built-in, array omni-directional microphones
Signal To Noise Ratio	65 dB
Pickup Range	16.40ft (5m) radius
Pickup Angle	360°
Frequency Response	200 Hz to 8 kHz

SPEAKER

Quantity	1
Power	3W
Sound Pressure Level	75 dB SPL@ 3.2ft (1m), 1kHz
Signal-to-Noise Ratio	≥75 dB
Distortion	≥5%
Cavity Volume	0.35L
Frequency Range	200 Hz - 8 kHz

DIMENSIONS

Product (L x W x H)	6.5" x 6.5" x 9.25"
Package	8" x 8" x 12"
Net Weight	1 lbs (0.45 Kg)
Gross lbs	2.24 lbs (1.11 Kg)

COMPATIBLE APPLICATIONS

Zoom	Yes
Cisco Webex	Yes
Skype	Yes
Teams	Yes

WHAT'S IN THE BOX

UC M40 Camera	1
Power Adapter	1
USB Cable	1
Quick Start Guide	1

CONNECTIVITY

Operating System	Windows/Mac/Android/Linux
Hardware requirement	2.4 GHz Intel Core 2 DuoProcessor or above| 2 GB RAM or above
Color System / Compression	YUY2/MJPG
USB	USB 2.0
USB Audio	Built-in Mic & Speaker
UVC	1.1

SYSTEM REQUIREMENTS

Windows	Windows 10 or Higher
MAC OS X	10.13 or Higher

SOFTWARE

Brightness	Yes
3D Noise Reduction	Yes
Contrast	Yes
Exposure	-2~+2
Stroboscopic suppression	Automatic, 50/60 Hz

POWER SUPPLY

I/O	12V 1A
Max Consumption	<8W

CONNECTION

DC I/O	1
USB-C	1

ENVIRONMENT

Operation Temp (°F)	32°F - 104°F
Operation Humidity	10-90% Room Humidity



Warranty

Camera	**3-Year Hot Swap***
Accessories	**1 Year**

*3-Year Hot-Swap Warranty provides a device to you with a return label for defective device.

FOLLOW US ON SOCIAL MEDIA

@MAXHUBUSA @MAXHUBUSA

@MAXHUBUSA YouTube.com/MAXHUBUSA

MAXHUB

21076 Bake Parkway, Suite 106, Lake Forest, CA 92630
949-270-5325 | Sales@MAXHUB-USA.com

Copyright 2023, MAXHUB USA All rights Reserved

Specifications are subject to change without notice. Size, weight, and color vary by configuration, and manufacturing process, please refer to the actual product.