PHILIPS

Lighting



MASTER VALUE LEDspot PAR

F A↑G

MAS LEDspot VLE D 6-50W 930 PAR20 25D

With its robust design and warm-white beam of light, these new-generation PAR lamps are ideal for general lighting and spot lighting in the hospitality industry. It's a dimmable solution. They are especially suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. The product offers more energy saving comparing with normal LED spots.

Product data

General Information	
Cap base	E27 [E27]
Nominal lifetime	25,000 h
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Flux measurement reference	Narrow Cone

Light Technical	
Colour Code	930 [CCT of 3000K]
Beam angle (nom.)	25 degree(s)
Luminous Flux	515 lm
Luminous intensity (nom.)	1,600 cd
Colour designation	White (WH)
Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	85 lm/W
Colour consistency	<6
Colour rendering index (CRI)	90
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	515 lm
Flickering value (PstLM)	1
Stroboscopic effect	0.4
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	6 W
Lamp current (nom.)	40 mA
Wattage equivalent	50 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (nom.)	220-240 V

Temperature	
T-Case maximum (nom.)	80 °C

MASTER VALUE LEDspot PAR

Controls and Dimming	
Dimmable	Only with specific dimmers

Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	PAR20 [PAR 2.5 inch/63 mm]

Approval and Application	
Energy Efficiency Class	F
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	6 kWh
EPREL registration number	1121752
EyeComfort	Yes

Product Data	
Full EOC	871951444306800
Order product name	MAS LEDspot VLE D 6-50W 930 PAR20 25D
Order code	44306800
SAP numerator – quantity per pack	1
Numerator – packs per outer box	6
Material number (12NC)	929003485802
Full product name	MAS LEDspot VLE D 6-50W 930 PAR20 25D
EAN/UPC - Case	8719514443075

Dimensional drawing



Product	D	C
MAS LEDspot VLE D 6-50W 930 PAR20 25D	65 mm	85 mm

Photometric data



Accent Lighting Spots - MAS LEDspot VLE D 6-50W 930 PAR20 25D



Light Distribution Diagram - MAS LEDspot VLE D 6-50W 930 PAR20 25D

MASTER VALUE LEDspot PAR

Photometric data

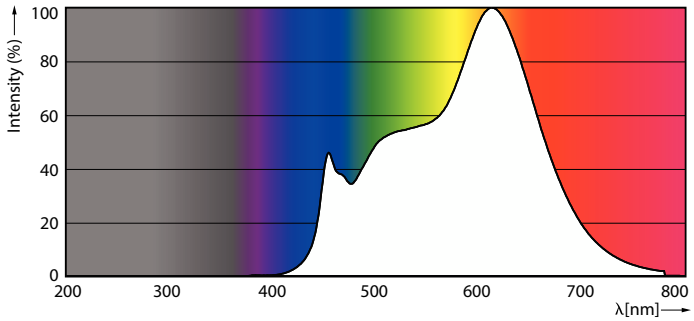

Spectral Power Distribution Colour - MAS LEDspot VLE D 6-50W 930 PAR20 25D

Lifetime

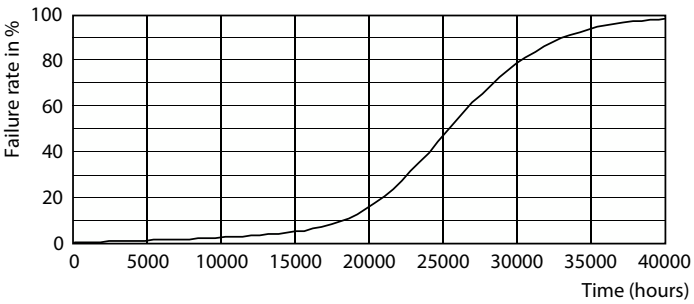

Life Expectancy Diagram - MAS LEDspot VLE D 6-50W 930 PAR20 25D

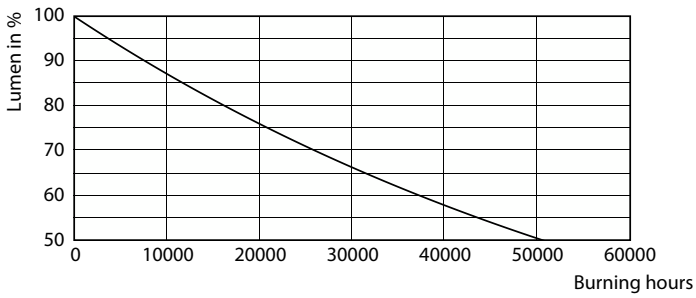

Lumen Maintenance Diagram - MAS LEDspot VLE D 6-50W 930 PAR20 25D

© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.