

MASTER Glass LED bulbs



MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G

LED, A60, Only with specific dimmers, E27, 2200 K, 2700 K, 470 lm, CRI 95, 25000 hour(s), Glass

Featuring a classic heritage design, these filament MASTER glass bulbs combine the familiar shapes of incandescent glass LED bulbs with the benefits of long-lasting LED technology. Ideal for creating a cozy atmosphere for customers, these glass LED bulbs provide excellent quality of light. MASTER glass bulbs can be dimmed for different lumen levels and color temperatures (dimmable glass led bulbs). They also deliver significant energy savings, using 30% less energy compared to normal LED bulbs. By offering a lifetime of 25,000 hours, these dimmable glass LED bulbs also reduce maintenance costs.

Product data

General Information	
Cap-Base	E27
Nominal lifetime	25,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere
Warranty period	5 years

Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	470 lm
Color Designation	Warm Glow(WG)

Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	138 lm/W
Color Consistency	<6
Color rendering index (CRI)	95
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	3.4 W
Lamp Current (Nom)	24 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s

MASTER Glass LED bulbs

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	70 °C

Controls and Dimming

Dimmable	Only with specific dimmers

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	A60
Net Weight (Piece)	0.031 kg

Approval and Application

Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1969960
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes

Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.9
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions

can it be used in closed luminaires	No

Product Data

Order product name	MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G
Full product name	MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G
Full product code	872016931103900
Order code	929003798902
Material Nr. (12NC)	929003798902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169311039
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169311046


Dimensional drawing




Product	D	C
MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G	60 mm	108 mm

MASTER Glass LED bulbs


Photometric data

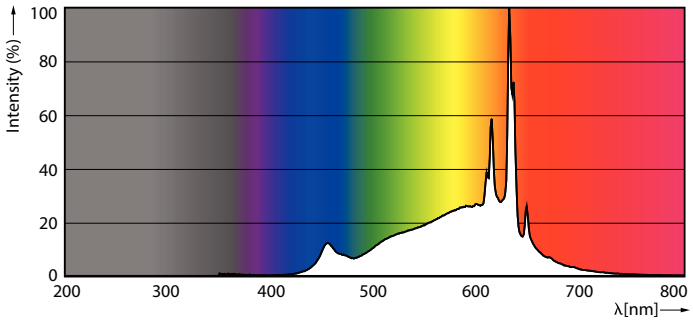

Spectral Power Distribution Colour - MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G




General uniform lighting - MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G




Light Distribution Diagram - MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G

Lifetime

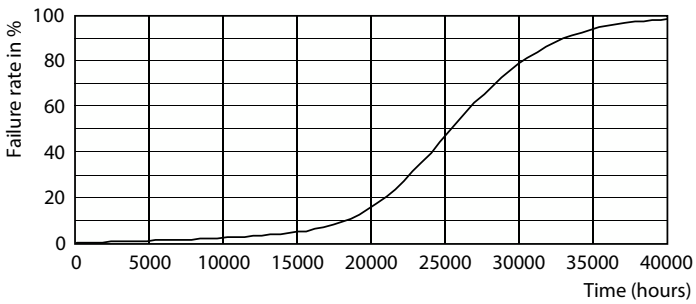

Life Expectancy Diagram

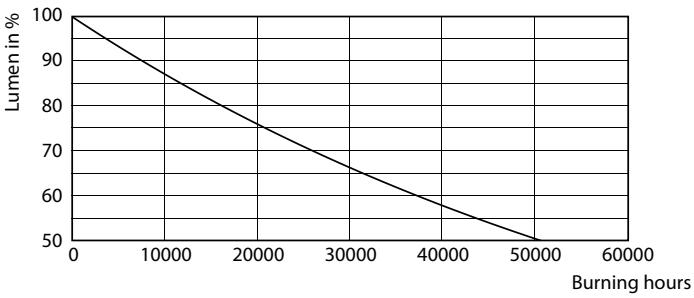

Lumen Maintenance Diagram - MAS LEDBulbDT3.4 -40W E27 CRI95 A60 FR G

MASTER Glass LED bulbs

© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.