

Fiber Optical 12 Colored Pigtail

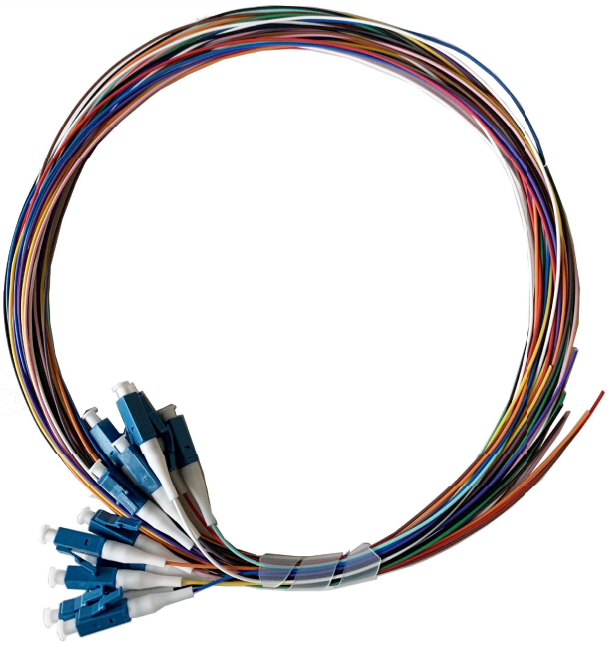

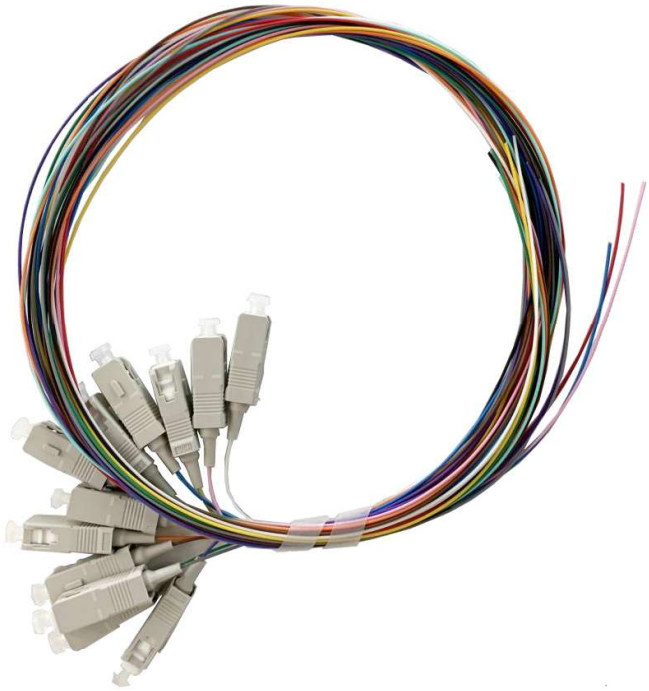

Features:

- Ceramic Ferrule;
- High return loss;
- Low insertion loss;
- Good repeatability and and exchangeability;
- Excellent Polished and 100% tested;
- Available in Standard & Custom Length

Application:

- Optical fiber communication system
- Optical access network
- Optic-fiber Date Communication
- Optical-fiber CATV
- A local area network (LAN)
- FTTX
- Data Center

LANVIEW
PROFESSIONAL NETWORK SOLUTIONS

Specification:

Connector Type	SC/ST/FC/LC/MU		
Fiber Type	Single-mode G652D, G657A, G657B		Multi-mode OM1, OM2, OM3, OM4
Polish	UPC	APC	PC
Insertion Loss	≤0.3dB	≤0.3dB	≤0.3dB
Return Loss	≥50dB	≥60dB	≥35dB
Repetition Test	Additional Loss<=0.1dB,Return Loss Variability<5dB		
Temperature Stability(-40℃～85℃)	Additional Loss<=0.2dB,Return Loss Variability<5dB		
Operating Temperature	-40℃～+75℃		
Storage Temperature	-40℃～+85℃		
Option:Cable Diameters	0.9mm		
Cable Type:	Simplex		
Cable Jacket Type	PVC, LSZH		
Fiber Tube	Easy Strip,Tight Buffer		
Outer Jacket color	Blue, Orange, Green, Brown, Gray, White, Black, Yellow, Red, Pink, Aqua, Purple		
Cable Length	1M, 1.5M, 2M, Other Length Available Upon Request		