TDP-225W Desktop Direct Thermal Printer

High Performance for Patient ID Applications

pdc® Healthcare

A Brady Business BRADY

Where positive identification meets safe, efficient patient care.



TDP-225W Desktop Direct Thermal Printer

With easy loading and fast, crisp printing, the TDP-225W is the ideal printer for printing direct thermal patient ID wristbands and labels.



Easy loading



Fast, crisp printing



Versatility to print wristband & labels

High Performance Printing for Patient ID Applications

- Max print speed up to 5 ips
- Easy loading of wristband and label rolls
- Versatility to print wristbands or labels
- Compatible with other printers and a wide variety of wristbands and labels
- Accommodates rolls up to 6.5" OD
- Convenient LCD screen for printer status
- Includes Ethernet and USB 2.0 standard



Ask how you can get this printer at NO COST!*

Call 888.672.3830


or go to

www.pdchealthcare.com/myprinters

*Refer to purchasing agreement for complete details. Offer ends 3/31/17.

Printer Specifications

Model number	TDP-225W	TDP-324W
Part number	PD225WHC-DT-PDA	PDT324WHC-DT-PDA
Resolution	203 dpi	300 dpi
Printing method	Direct thermal	
Max print speed	5 ips	4 ips
Max. print width	2.05"	1.89"
Max. print length	90"	40"
Label roll capacity	6.5" OD. 1" or 1.5" core	
Processor	32 bits RISC high performance processor	
Memory	■ 4 MB Flash memory ■ 8 MB SDRxAM ■ MicroSD card slot for memory expansion, up to 4 GB	
Interface	■ USB 2.0 (full speed mode) ■ Internal Ethernet (10/100 Mbps) ■ 128 x 64 pixels graphic type LCD display with back light ■ USB host, for scanner or PC keyboard (factory option)	
Power	External universal switching power supply ■ Input : CA 100-240 V ■ Output : CC 24 V 2 A	
Operation switch, button, LED	One power switch, one feed button & one LED (3 colors)	
Sensors	■ Gap transmissive sensor (offset 4 mm from center) ■ Black mark reflective sensor (position adjustable) ■ Head open sensor	
Real time clock	Standard	
Media type	Wristbands and Labels	
Media wound type	Wound In/Wound Out	
Media width	0.59"-2.05"	0.59" - 1.89"
Media thickness	2.3-7.4 mil. max. 150 g/m2	
Media core diameter	1" /1.5"	
Printer language	TSPL-EZTM, ZPL II	
Environment condition	Operation: 41~104°F (5~40°C), 25~85% non-condensing Storage: -40~140°F (-40~60°C), 10~90% non-condensing	
Safety regulation	FCC Class B, CE Class B, C-Tick Class B, UL, CUL, TÜV/Safety, CCC	
Accessories	■ Windows labeling software CD disk ■ Quick start guide ■ USB port cable ■ External universal switching power supply ■ Power cord	
Limited warranty	■ Printer: 2 years ■ Print head: 1 million inches or 12 months whichever comes first ■ Platen: 2 million inches or 12 months whichever comes first	
Bar code	1D bar code: Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleave 2 of 5 2D bar code: PDF-417, Maxicode, DataMatrix, QR code, Aztec	

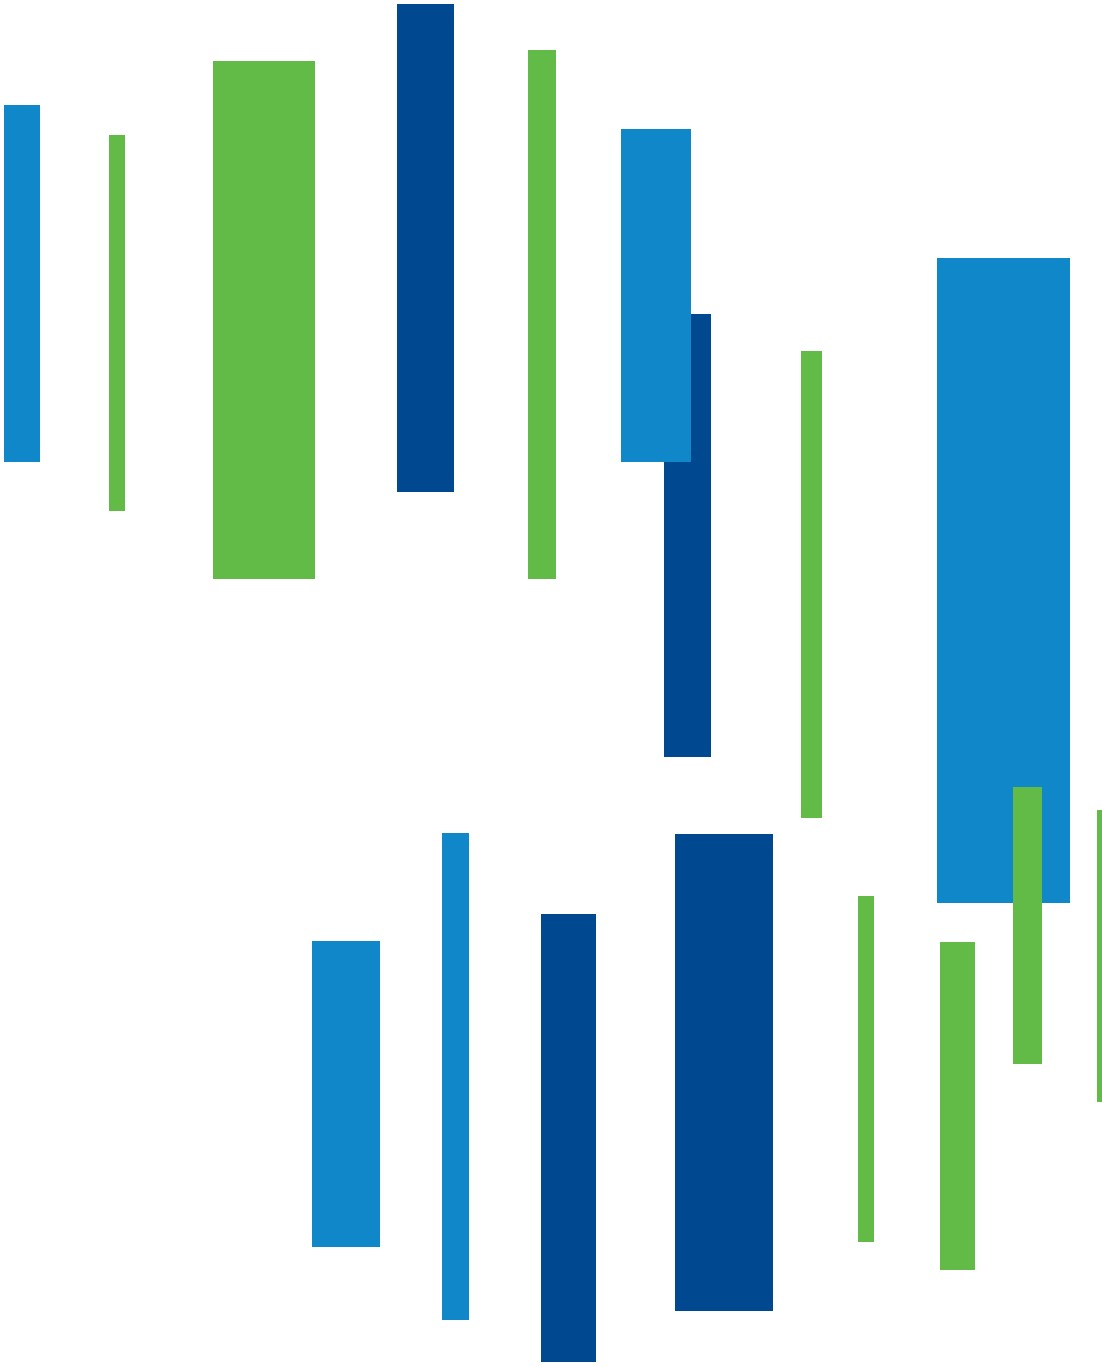

pdc® Healthcare

A Brady Business BRADY

Where positive identification
meets safe, efficient patient care.

27770 N. Entertainment Drive, Suite 200
Valencia, CA 91355
Tel: 800.435.4242 | Fax: 800.321.4409
Email: info@pdchealthcare.com
www.pdchealthcare.com

HC-539-0316 2000