Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

MPXPEM-EHAEXR30

OUTPUT POWER

BRANCH	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER BRANCH
SYSTEM ORIENTED					

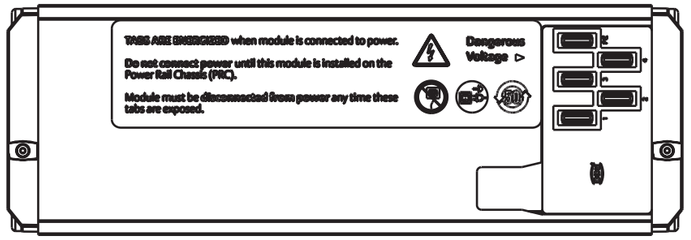

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft/3m	IEC 60309	3/N/PE	50/60	200-240/346-415	32	32

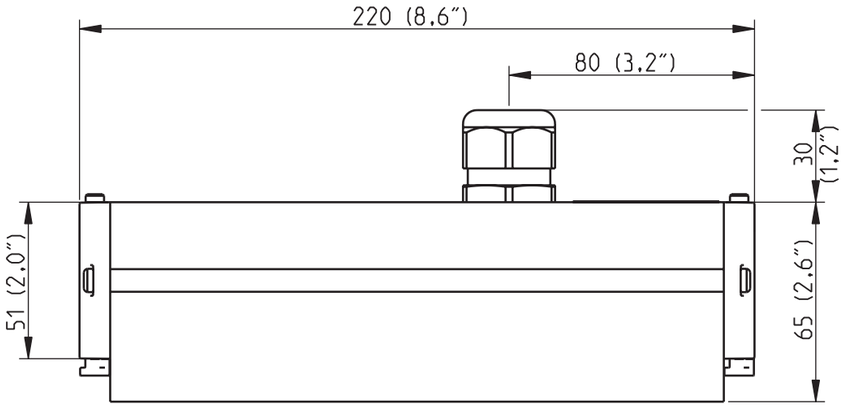

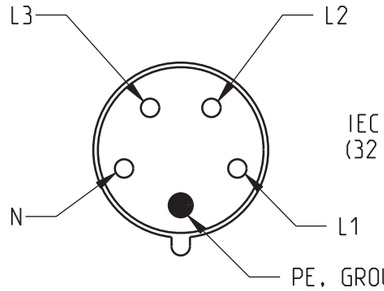

IEC 60309
(32 A, 3/N/PE, 200-240/346-415 V, RED 6H)

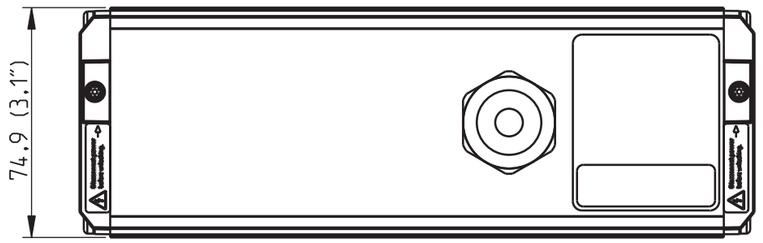

AGENCY COMPLIANCE:
- CE-mark: LVD, EMC, RoHS (incl. harmonized standards hereunder)
- BG certification: BV-BG (factory inspected)
- WEEE COMPLIANT

ENVIRONMENTAL RATING:
OPERATING TEMPERATURE: 5°C - 60°C (41°F - 140°F) NON-CONDENSING, NON-CORROSIVE, 10% -90%
STORAGE TEMPERATURE: -20°C - 85°C (-4°F - 185°F)
MAX. OPERATING ALTITUDE: 2000 m

NOTES:
1. UNIT DIMENSIONS: 220 mm (8.6") W x 74.9 mm (3.1") D x 95 mm (3.7") H
2. UNIT WEIGHT: 2 kg / 4.5 lbs
3. SHIPPING DIMENSIONS: 397 mm (15.6") W x 395 mm (15.5") D x 170 mm (6.7") H
4. SHIPPING WEIGHT: 2.5 kg / 5.5 lbs

RoHS COMPLIANT

Dimensions in mm

Rev.	Change	Date	Name
A	18303	02/11/2017	Petrů

Platine:

Allgemeintoleranzen General tolerances	Oberfläche Finish	Werkstoff / Material	Gewicht: Weight :
-	-	-	

	Date	Name
2016		
Drawn	02.09.	Racek
Checked	02.09.	Franc
Approved		

Bezeichnung / Description
MPX PEM E 220 32A EU IEC 3PH
Elementary

Zeichnungs-Nr. / Drawing no.
MPXPEM-EHAEXR30

Maßstab Scale: 3:10

Verwendet in / Used in: -

Blatt/Sheet: 1/1

File: