

Philips LED Inspection lamps
CBL30 Cabled Lamp

High Quality LED

330 lm + 90 lm pointer
6 metres cable
360°Magnetic Hook



LPL14X1

See better, work better

Professional lighting tool with focus light

The ultra-slim Philips LED inspection lamp delivers large amounts of light through the powerful Philips LED mounted on the thin frame and its LED focus light on top.

High-quality Philips white LED light
- Defeat the darkness with soft natural light
- Wide beam angle: up to 100°
- Focus light: 90 lumens
- High-quality LED light up to 330 lumens

High resistance
- Strong impact resistance -IK07
- Water and dust protected -IP54
- Resistant to chemicals and workshop solvents

Hands-free lighting
- Rotating magnet


PHILIPS

CBL30 Cabled Lamp
High Quality LED 330 lm + 90 lm pointer, 6 metres cable, 360°Magnetic Hook

LPL14X1

Highlights

Wide beam angle: up to 100°

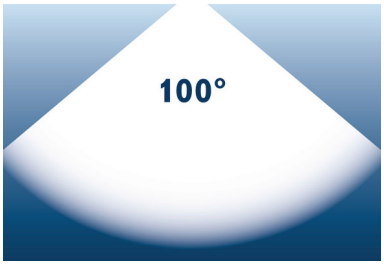

The wide beam angle of 100° will enable you to focus on specific parts and to deliver the right amount of light you need.

Water and dust protected -IP54



The LED inspection lamp is water resistant and conforms to IP54.

Strong impact resistance -IK07



Strong impact resistance -IK07

Rotating magnet



Use the rotating magnet to position the lamp and its light where you need it, providing you with clear and precise visibility of the work space.

Resistant to chemicals

As well as resisting knocks, the inspection lamp cases are resistant to water, chemicals and workshop solvents.

Focus light: 90 lumens



The focus light will enable you to see what remains hidden for others; thanks to its ultra-slim design the lamp can be manoeuvred into very small cavities and the strong LED source will illuminate all.

High quality LED light

With 330 lumens, high-quality LED light output ensures that you are not left in the dark when trying to spot even the smallest details.

Defeat the darkness

Philips professional workshop lamps feature powerful LEDs for an intense white light and a bright wide beam to defeat the darkness. Designed to optimise clarity and vision, the 6000 K white light also improves visual comfort for fatigue-free working.

Specifications

Outer Carton
- Number of consumer packages: 6
- Outer carton (L x W x H): 60 x 37 x 15 cm
- Gross weight: 2.2 kg
- GTIN: 1 87 27900 38950 7

Ordering information
- Order entry: LPL14X1
- Ordering code: 38950031

Electrical characteristics
- Plug type: EU
- Power source: Cable
- Voltage: 100–240 V
- Wattage: 5 W

Light characteristics
- Beam angle: 100 degree
- Beam angle (pointer): 90 degree
- Colour temperature: Up to 6500 K
- LED lifetime: 10,000 hrs
- Light output: 330 lumen
- Light output (pointer): 90 lumen

Outer pack information
- Gross weight per piece: 6220 g
- Height: 15 cm
- Length: 60 cm
- Width: 37 cm

Packaging Data
- EAN1: 8727900389500
- EAN3: 8727900389517

Packed product information
- Cable length: 6 m
- Diameter: 2.5 cm
- Height: 47.5 cm
- Pack Quantity / MOQ: 6
- Weight with cable: 800 g
- Weight without cable: 220 g

Product description
- Hook: 360° adjustable clipping hook
- Impact protection rating (IK): IK07
- Ingress protection rating (IP): IP54
- Magnet
- Materials and finishing: Aluminium housing
- Number of LEDs: 12
- Operating Temperature: -10 to 40 °C
- Resistant to: grease, oil, workshop solvents
- Technology: LED
- Range: CBL

Power consumption
- Energy efficiency label: A+
- Power consumption per 1000h: 4.91 kW·h

Issue date 2018-08-25
Version: 7.1.4
12 NC: 9237 957 70101
EAN: 87 27900 38950 0

© 2018 Philips Lighting Holding B.V.
All Rights reserved.
Specifications are subject to change without notice. Trademarks are the property of Philips Lighting Holding B.V. or their respective owners.

www.philips.com