THE DISPLAY CHOICE
OF PROFESSIONALS™

DF-Series LED-backlit Display 55”



One Set Display, Twice the Impact

700 nits

A B

IPC

Featuring Full HD resolution and high brightness, the DF-Series is capable of delivering crisp images in diverse indoor environments. Dual HDMI connections make it easy to integrate IPCs or media players in order to display unique content on each screen. With a metal housing and movable floor stand, the DF-Series is ideal for a wide array of public environments.



displays.agneovo.com



Slim Metal Housing

With a 23.4mm amazingly slim profile, the DF-Series is shielded by a thin but highly-durable metal housing that creates a compact profile while ensuring safety and durability in public settings.

Multiple Media Playback Options

HDMI ports located on both the front and rear of the display allow you to incorporate either media players or IPCs to broadcast the media of your choice.



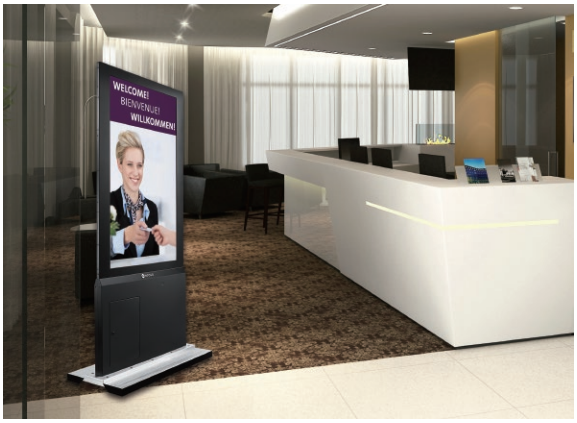

Convenient Mobility

A free-standing, movable floor stand on removable casters makes the DF-series displays exceedingly agile.

Features

- Full HD 1920 x 1080 resolution
- 700 nits high brightness panels (front & back) fulfill diverse professional signage applications
- VA Panel technology ensures accurate colours and offers high contrast ratios with wide viewing angles
- Dual-sided LCD signage with independent HDMI inputs
- Durable metal housing
- 23.4mm slim depth design
- Storage bay for media player / IPC
- Designed and developed for continuous 24/7 operation
- Free standing and movable floor stand

THE DISPLAY CHOICE
OF PROFESSIONALS™



Specifications

		DF-55
Panel	Panel Type	LED-Backlit TFT LCD (VA Technology)
	Panel Size	54.6”
	Max. Resolution	FHD 1920 x 1080
	Pixel Pitch	0.630 mm
	Brightness	700 cd/m²
	Contrast Ratio	4000:1
	Viewing Angle (H/V)	178°/178°
	Display Colour	1.07B
	Response Time	5 ms
	Surface Treatment	Anti-Glare Treatment (Haze 11%), 3H Hard Coating
Frequency (H/V)	H Freq.	30 kHz-92 kHz
	V Freq.	49 Hz-85 Hz
Input	HDMI	1.4 x 2
Power	Power Supply	Internal
	Power Requirements	AC 100-240V, 50/60 Hz
	On Mode	192W (On)
	Stand-by Mode	< 2W
	Off Mode	< 1W
Operating Conditions	Temperature	0°C-40°C (32°F-104°F)
	Humidity	20%-80% (non-condensing)
Storage Conditions	Temperature	-10°C-50°C (14°F-122°F)
	Humidity	20%-80% (non-condensing)
Dimensions	Display (W x H x D)	952.7 x 2030.7 x 452.4 mm (37.5” x 79.9” x 17.8”)
	Packing (W x H x D)	
	Box1	1609.0 x 968.0 x 176.0 mm (63.4” x 38.1” x 6.9”)
	Box2	1068.0 x 735.0 x 400.0 mm (42.1” x 28.9” x 15.8”)
Weight	w/Base	94.5 kg (207.9 lb)
	Packaging	
	Box1	48.0 kg (105.8 lb)
	Box2	62.0 kg (136.7 lb)
Regulation Approval	Certifications & Compliance	CE, CB, FCC, RoHS, WEEE, REACH, EAC
Accessories	Supplied	Power Cord, Remote Control, Batteries

All specifications are subject to change without prior notice.
Copyright © 2019 AG Neovo. All rights reserved. The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: DF55B0 Version 4.1, 20190517

Global Headquarters
Taipei, Taiwan

EMEA Regional Headquarters
Capelle a/d Ijssel, The Netherlands

North & South America Regional Headquarters
San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters
Taipei, Taiwan

Canada Sales Office
Vancouver, B.C., Canada

China Sales Office
Shanghai, China

Czech Republic Sales Office
Brno, Czech Republic

Denmark Sales Office
Støvring, Denmark

Germany Sales Office
Mechernich, Germany

Italy Sales Office
Livorno, Italy

Poland Sales Office
Warsaw, Poland

Spain Sales Office
Barcelona, Spain

Ukraine Sales Office
Lviv, Ukraine

displays.agneovo.com

AG neovo