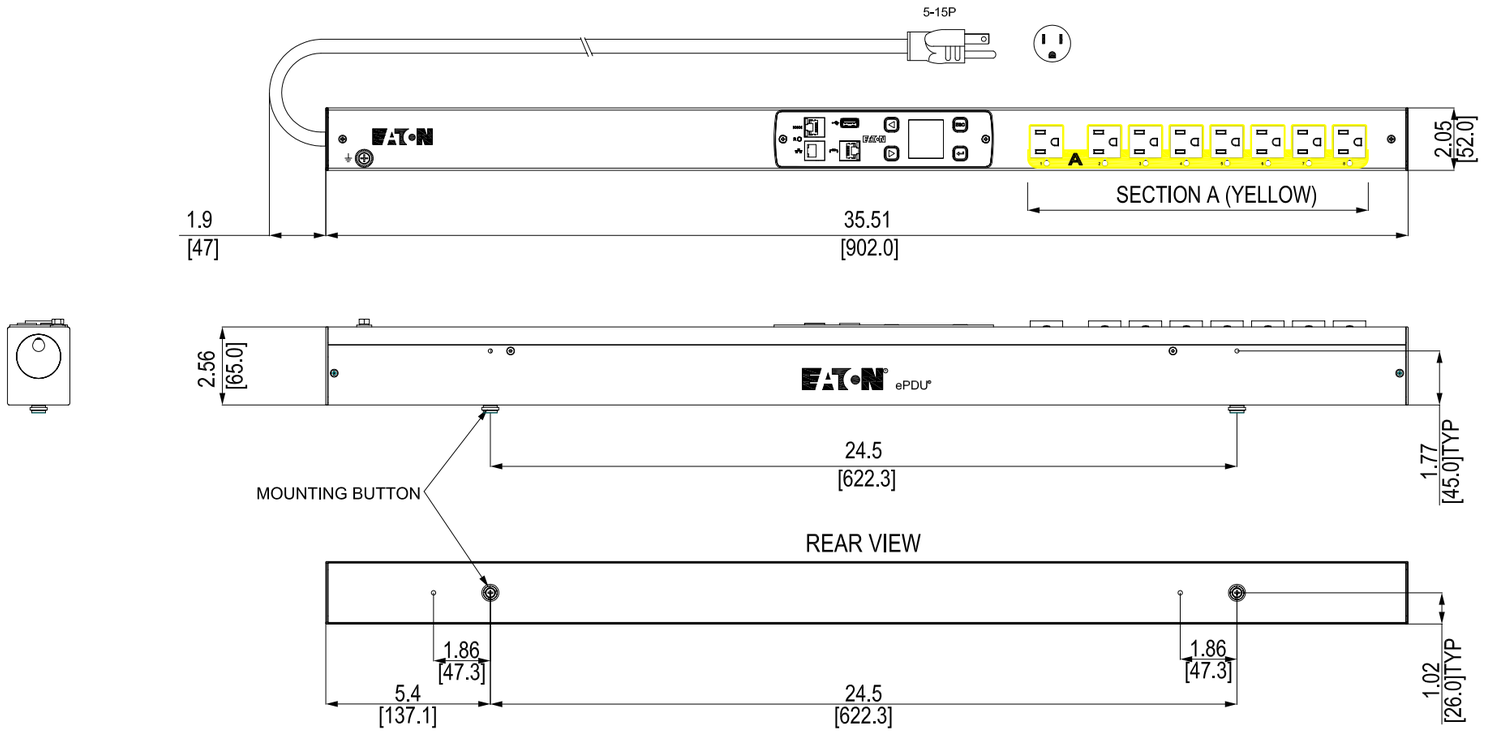

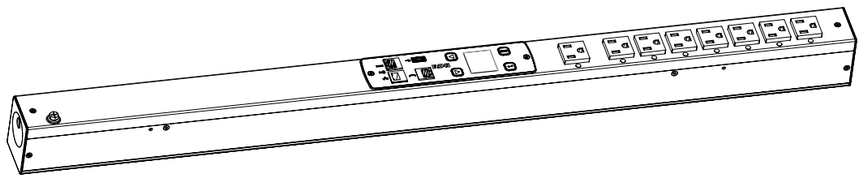

EMA111-10
G3 MANAGED

FUNCTIONALITY	INPUT	OUTPUT	OPERATING TEMPERATURE
CURRENT, POWER, AND ENERGY METERING FOR INPUT AND OUTLET; OUTLET SWITCHING	NEMA 5-15P 10FT 14AWG/3C POWERCORD	(8) NEMA 5-15R	32° TO 140° F 0° TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
35.5" (902mm) LENGTH 2.05" (52mm) WIDTH 2.56" (65mm) DEPTH ALUMINUM CHASSIS, BLACK	100-127V~ W+N+PE 12A 50/60 Hz	100-127V~ 12A MAX PER OUTLET 12A MAX TOTAL	c UL us LISTED
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	INCLUDED SPK012 - INSTALLATION INCLUDED SPK013 - NETWORK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMA6MA15ALA84AC

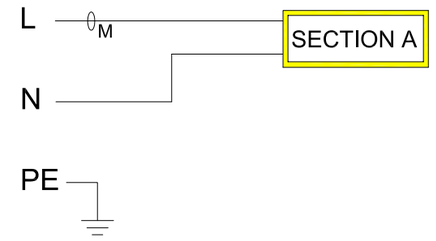

TITLE	ePDU G3 SPECIFICATION EMA111-10		DRAW	Deng Dai 2014-08-06
			DESIGN	Deng Dai 2014-08-06
DWG NO.	B9001-222210-00P		CHECKED	Deng Dai 2014-08-06
MATERIAL			SAFETY	Merry Sun 2014-08-06
COATING			APPROVED	Vicky Shen 2014-08-11
UNITS	in[mm]	A3 SCALE 1:2	EATON ELECTRICAL SECTOR	
SHEET	1/1			