

MASTER PL-C Xtra 4 Pin

MASTER PL-C Xtra 18W/840/4P 1CT/5X10CC

Energy-saving compact fluorescent lampsCompact long-arc low-pressure mercury discharge lampEnvelope consists of 4 parallel narrow fluorescent tubes

Product data

• General Information

Cap base	G24Q-2 [G24q-2]
Life to 50% failures preheat (nom.)	33000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	96 %
LSF Preheat 16000 h Rated	94 %
LSF Preheat 20000 h Rated	90 %

• Light Technical

Luminous flux (nom.)	1200 lm
Luminous flux (rated) (nom.)	1200 lm
Colour designation	Cool White (CW)
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	380
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (nom.)	67 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
LLMF 16000 h Rated	79 %
LLMF 20000 h Rated	78 %

• Operating and Electrical

Power (Rated) (Nom)	18.0 W
Lamp current (nom.)	0.220 A

• Temperature

Design temperature (nom.)	28 °C

• Controls and Dimming

Dimmable	yes

• Mechanical and Housing

Cap base information	4P

• Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	3.0 mg
Energy Consumption kWh/1000 h	20 kWh

• Product Data

Full product code	871150095036970
Order product name	MASTER PL-C Xtra 18W/840/4P 1CT/5X10BOX

PHILIPS

MASTER PL-C Xtra 4 Pin

EAN/UPC – product	8711500950369
Order code	95036970
Local Code	18PLC8404PXTRA
Numerator – quantity per pack	1
Numerator – packs per outer box	50
Material no. (12NC)	927906584014
Net weight (piece)	55.300 g
ILCOS Code	FSQ-18/40/1B-E-G24q=2

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

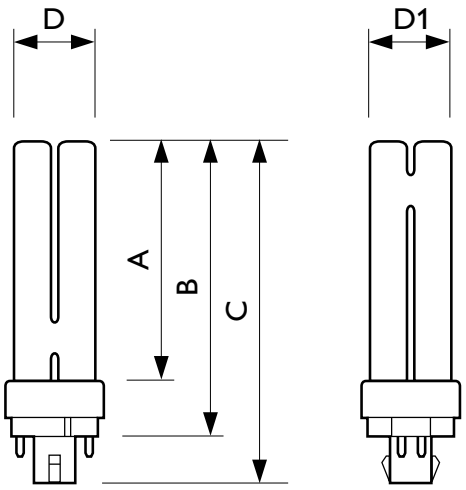

G24q-2/G24q-3, 4P



PL-C Xtra 18W/840/4P

Product	D	D1	A	B	C
MASTER PL-C Xtra 18W/840/4P 1CT/5X10BOX	27.1 mm	27.1 mm	109.7 mm	128.0 mm	142.9 mm

Photometric data

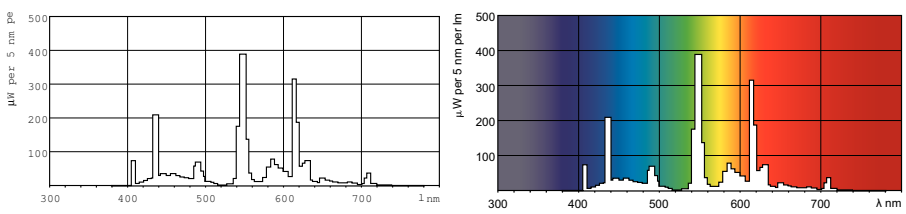

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change