2016, September 21
data subject to change



Product Description

TL-X XL

Single-pin low-pressure mercury discharge lamps with a tubular 38 mm envelope

Benefits

- In combination with a special lampholder all possible sparking effects during ignition are eliminated
- Extended lifetime compared with standard TL lamps

Features

- 40W and 65W lamps with internal ignition strip for instant start, non-preheat, starterless operation

Application

- Used in flameproof and increased-safety luminaires for both indoor and outdoor applications
- Used in applications like petro-chemical industry, offshore, mines and any locations where traces of explosive gases may be found

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


PHILIPS

Related products



Fa6, T12

Dimensional drawing

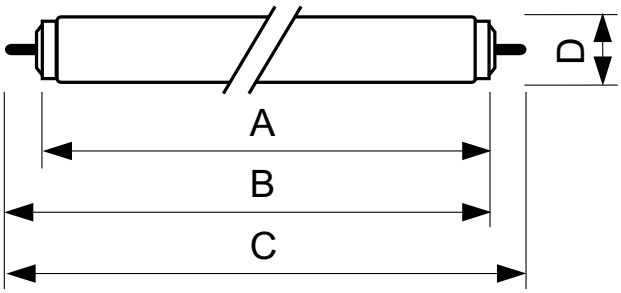

Fa6, T12

TL-X XL 40W/33-640

Product	D	A	B	B	C
TL-X XL 40W/33-640 SLV/25	40.5 mm	1183.5 mm	1202 mm	1198.5 mm	1220.5 mm

General Information

order code	Bulb Shape	Cap-Base	Life To 10% Failures (Nom)	Life To 50% Failures (Nom)
26135940	T12	FA6	21000	26000
26137340	T12	FA6	21000	26000

order code	Bulb Shape	Cap-Base	Life To 10% Failures (Nom)	Life To 50% Failures (Nom)
26139740	T12	FA6	21000	26000

Light Technical

order code	Chroma-ticity Coor-dinate X (Nom)	Chroma-ticity Coor-dinate Y (Nom)	Color Designa-tion	Correlated Color Tempera-ture (Nom)	Color Rendering Index (Nom)	Lumen Mainte-nance 10000 h (Nom)	Lumen Mainte-nance 2000 h (Nom)	Lumen Mainte-nance 5000 h (Nom)	Luminous Efficacy (rated) (Nom)	Lumi-nous Flux (Nom)
26135940	377	381	Cool White (CW)	4100	63	0	88	83	47	940
26137340	377	381	Cool White (CW)	4100	63	0	88	83	58	2300
26139740	377	381	Cool White (CW)	4100	63	0	88	83	69	4400

Operating and Electrical

order code	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)
26135940	0.380	58	20.0
26137340	0.430	103	39.0
26139740	0.670	110	64.0

Approval and Application

order code	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)	Mercury (Hg) Content (Nom)
26135940	25	B	12.0
26137340	47	B	12.0
26139740	74	A	12.0

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, September 21
data subject to change