

MASTER PL-T 2 Pin

MASTER PL-T 26W/830/2P 1CT/5X10CC

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

PHILIPS

MASTER PL-T 2 Pin

Product data

• General Information

Cap base	GX24D-3 [GX24d-3]
Life to 10% failures (nom.)	6500 h
Life to 50% failures (nom.)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %

• Light Technical

Luminous flux (nom.)	1800 lm
Luminous flux (rated) (nom.)	1725 lm
Colour designation	Warm White (WW)
Chromaticity coordinate X (nom.)	436
Chromaticity coordinate Y (nom.)	401
Correlated colour temperature (nom.)	3000 K
Luminous efficacy (rated) (min.)	66 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	84 %
LLMF 8000 h Rated	81 %

• Operating and Electrical

Power (Rated) (Nom)	26.0 W
Lamp current (nom.)	0.335 A

• Temperature

Design temperature (nom.)	28 °C

• Controls and Dimming

Dimmable	No

• Mechanical and Housing

Cap base information	2P

• Approval and Application

Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	32 kWh

• Product Data


Full product code	871150061102470
Order product name	MASTER PL-T 26W/830/2P 1CT/ 5X10BOX
EAN/UPC – product	8711500611024
Order code	61102470
Numerator – quantity per pack	1
Numerator – packs per outer box	50
Material no. (12NC)	927914583071
Net weight (piece)	66.000 g
ILCOS Code	FSM-26/30/1B-I-GX24d=3

Warnings and Safety


- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

MASTER PL-T 2 Pin

Dimensional drawing

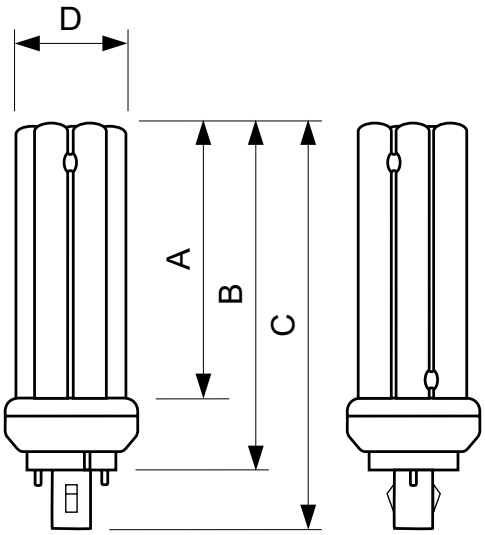


GX24d-3, 2P



PL-T 26W/830/2P M

Product	D	A	B	C
MASTER PL-T 26W/830/2P 1CT/5X10BOX	111.0 mm	134.2 mm		

Photometric data

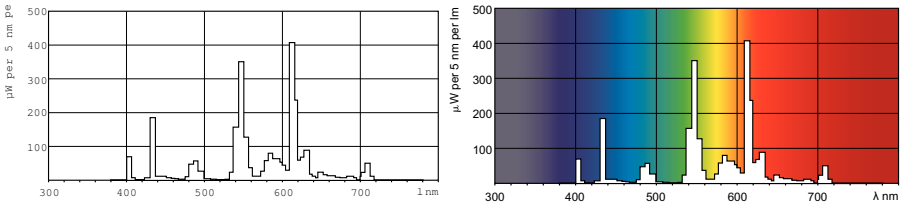

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change