ThinkStation P910 Platform Specifications

Components	Specification
Chipset	Intel C612 Platform Controller Hub (PCH)
System mgmt	Intel Active Management Technology 9
Processor	Up to two 160W **Intel Xeon E5-2600 v4** family processors. Each processor supports up to 22 cores up to 2.2GHz, 16 cores up to 2.6GHz, 14 cores up to 2.6GHz, 12 cores up to 3GHz, 10 cores up to 2.4GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Or up to two Intel Xeon E5-2620 v3 or E5-2609 v3 processors (not available in EMEA)
Coprocessor	Optional. Up to one Intel Xeon Phi Coprocessor 3120A, PCIe 2.0 x16 adapter, 57 cores, 1.1GHz, 28.5MB L2 cache, 6GB memory, 300W
Memory DIMM slots	16 DIMM sockets (8 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM or LRDIMM (cannot be intermixed), ECC, DDR4, 2400MHz
Memory capacity	896GB (LRDIMM, 14x64GB)/512GB (RDIMM, 16x32GB), 2nd CPU is needed
Graphics and GPU computing	Four PCIe 3.0 x16 slots for graphics and GPU computing cards, two slots per processor

Installed CPU	Maximum quantity of PCIe x16 adapters per system (by power)
1	1x300W+1x75W or 2x150W
2	2x300W+2x75W, or 1x300W+2x150W+1x75W, or 4x150W

Supporting Graphics and GPU computing

Adapter	Cores	Memory	Power	Connector***	SLI
NVS 310	48	1GB	19.5W	2xDP	
NVS 315	48	1GB	19.5W	2xDVI-I SL/2xDP	
NVS 510	192	2GB	35W	4xmini DP	
NVS 810	1024	4GB	68W	8xmini DP	
Quadro K420	192	2GB	41W	DVI-I DL+DP	
Quadro K620	384	2GB	45W	DVI-I DL+DP	
Quadro K1200	512	4GB	45W	4xmini DP	
Quadro K2200	640	4GB	68W	DVI-I DL+2xDP	
Quadro K4200	1344	4GB	108W	DVI-I DL+2xDP	
Quadro K5200	2304	8GB	150W	DVI-I DL+DVI-D DL+2xDP	SLI
Quadro M2000	768	4GB	75W	4xDP	
Quadro M4000	1664	8GB	120W	4xDP	
Quadro M5000	2048	8GB	150W	DVI-I DL+4xDP	SLI
Quadro M6000	3072	24GB	250W	DVI-I DL+4xDP	SLI
Quadro P400	256	2GB	30W	3xminiDP	
Quadro P600	384	2GB	40W	4xminiDP	
Quadro P1000	640	4GB	47W	4xminiDP	
Quadro P2000	1024	5GB	75W	4xDP	
Quadro P4000	1792	8GB	105W	4xDP	SLI
Quadro P5000	2560	16GB	180W	DVI-D DL+4xDP	SLI
Quadro P6000	3840	24GB	250W	DVI-D DL+4xDP	SLI
Tesla K40	2880	12GB	235W		

Disk drive controller	**RAID 0, 1, 5, 10** with onboard SATA controller in chipset, 6Gb/s SATA. **RAID 0, 1, 5, 10** with optional LSI RAID flex adapter, 12Gb/s SAS and SATA. **RAID 0, 1, 5, 6, 10** with optional LSI 9364-8i PCIe adapter, 1GB memory, 12Gb/s SAS and SATA
Drive Bays	Three external 5.25" bays, four internal 3.5" dual drives bays (see right)
Flex bay	Three 5.25" flex bays for optical drives, Front Access Storage Enclosure drives, Flex Bay Storage Enclosure drives, or flex module. • Up to three half-height optical drives or up to one 9.5mm optical drive, DVD-ROM, DVD±RW, or Blu-Ray burner • Up to one Front Access Storage Enclosure for one 3.5" or 2.5" SATA drive. • Up to two Flex Bay Storage Enclosure for two 3.5" or 2.5" SATA drives.


Supporting storage

3.5" SATA HDD, 7.2K 6Gbs	500GB/1TB/2TB/3TB/4TB/6TB/1TB hybrid/2TB hybrid
2.5" SAS HDD, 15K 12Gbs	300GB/600GB
2.5" SAS HDD, 10K 12Gbs	300GB
2.5" SAS SSD, 12Gbs	200GB/400GB/800GB
2.5" SSD, SATA6Gbs	180GB/240GB/256GB/480GB/512GB with OPAL, 256GB/512GB/1TB without OPAL
PCIe SSD, 2.5"	400GB
PCIe SSD, M.2	256 GB/512GB/1TB
PCIe SSD adapter	400GB (up to 4 per system, 2nd CPU is needed)

Components	Specification
Flex connector	Two flex connectors (see right), one per processor. Supports one of the following: • Up to one LSI RAID flex adapter for SATA/SAS RAID. • Up to two Multi-I/O adapters for four PCIe SSD (two PCIe SSD per adapter). • Up to two M.2 flex adapters for four M.2 PCIe SSD (two M.2 PCIe SSD per adapter)
Network interfaces	Integrated two-port gigabit ethernet (Intel i218LM and i210AT), supports Wake-on-LAN. Optional discrete ethernet adapters are available
HD Audio	Realtek ALC662 codec
TPM	TCG 1.2-compliant
Power supply	One fixed 1300 watts, autosensing, 92% PSU, 80 PLUS Platinum qualified *Note: PSU will automatically operate in 1120W (restricted mode) if the system line input is 100-110V. For other supported system line input voltages, the PSU will operate at the full 1300W.*
Front ports	Four USB 3.0 (one Diagnostic, one Always On), one combo audio/microphone jack (3.5mm)
Rear ports	Four USB 2.0, four USB 3.0 (blue), one serial (9-pin), two ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in), two PS/2
Add-on ports	Supports the following optional ports: Two IEEE 1394 (one on rear and one on front flex module) via PCIe adpater, up to one adapter per system. Two rear USB 3.0 per USB add-on PCIe adapter, up to 3 adapters per system. One rear Thunderbolt via PCIe adapter. One front eSATA (on flex module), or one rear eSATA via cable (also needs one PCIe slot), up to one eSATA port per system. One internal USB 3.0 port via cable, cannot be intermixed with 29-in-1 reader
Media reader	9-in-1 USB 2.0 card reader. Optional 29-in-1 USB 3.0 card reader on flex module
Mechanical	• 55-liter: 200mm/7.87" W x 620mm/24.4" D x 446mm/17.56" H (with feet) • Tool-less parts: all except CPU fansink • 71.3 lb (32.3kg) max configuration
Environmental specification	(see below)
Base warranty	3-year limited onsite service with 9x5/NBD
ISV certifications	Please visit www.thinkworkstations.com/isv-certifications/

Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
Temperature - non operating (no package)	14 °F to 140 °F (-10 °C to 60 °C)
Temperature - non operating (with package)	-40 °F to 140 °F (-40 °C to 60 °C)
Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
Humidity - operating	10%~80%, non-condensing
Humidity - storage (with package)	10%~90%, non-condensing

RoHS-compliant, GREENGUARD on all models. EPEAT Gold rating, ENERGY STAR 6.1 qualified on selected models.

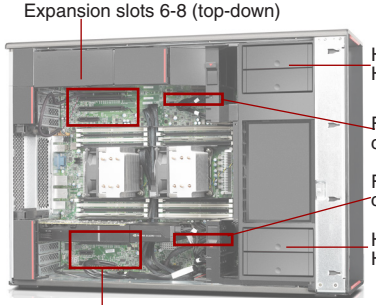

Expansion slots

Slot 1: PCIe 3.0 x16, full length, full height,
Slot 2: PCIe 2.0 x1, full length, full height
(half length if flex connector 1 is used)
Slot 3: PCIe 3.0 x16, full length, full height
Slot 4: PCIe 2.0 x1, full length, full height
Slot 5: PCIe 2.0 x4, Half length, full height
Slot 6: PCIe 3.0 x16, full length, full height, CPU2 needed
(half length if flex connector 2 is used)
Slot 7: PCIe 3.0 x16, full length, full height, CPU2 needed
(half length if flex connector 2 is used)
Slot 8: PCIe 2.0 x4, full length, full height, CPU2 needed

Also supports up to two flex connectors. Flex connector 2 needs 2nd CPU

Drive bays

HDD 1-4: Standard 3.5" HDD bay, up to four 3.5" or 2.5" disk drives.
Each 3.5" bay supports 2.5" (9mm or less) drive plus 3.5" drive, or two 2.5" (15mm or less) drives. More than 4 drives requires LSI RAID flex adapter or 9364-8i adapter,

Flex bay: Three 5.25" flex bays, for HH optical drives.
Or up to one optional flex module (Flex module supports one or more of the following options: 9.5mm optical/29-in-1 USB 3.0 reader/front IEEE 1394/front eSATA).
Or up to two HDD bays for two drives, 3.5" or 2.5" each, SATA only.

© Copyright Lenovo 2017. All rights reserved.

Model	30B90004++
Product	ThinkStation P910
Region	EMEA Focus
Machine Type	30B9
TopSeller	TopSeller
Processor	1xXeon E5-2630 v4 10C/2.2GHz/25MB/85W/DDR4-2133
Graphics	Open
Memory	1x8GB RDIMM DDR4-2400 ECC
Storage Controller	Onboard SATA
Max Drives in 3.5" Bays	4
Disks	1x256GB SSD 2.5" SATA6Gbps Opal
M.2 Drives	None
Optical	HH DVD±RW
Media Reader	9-in-1
Power Supply	1300W 92%
Add-on Ports	None
Discrete Ethernet	None
Keyboard / Mouse	USB / USB
Operating System	Windows 10 Pro 64
Warranty	3-year
Global	No
Ann Date (mm/yy)	04/16