Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

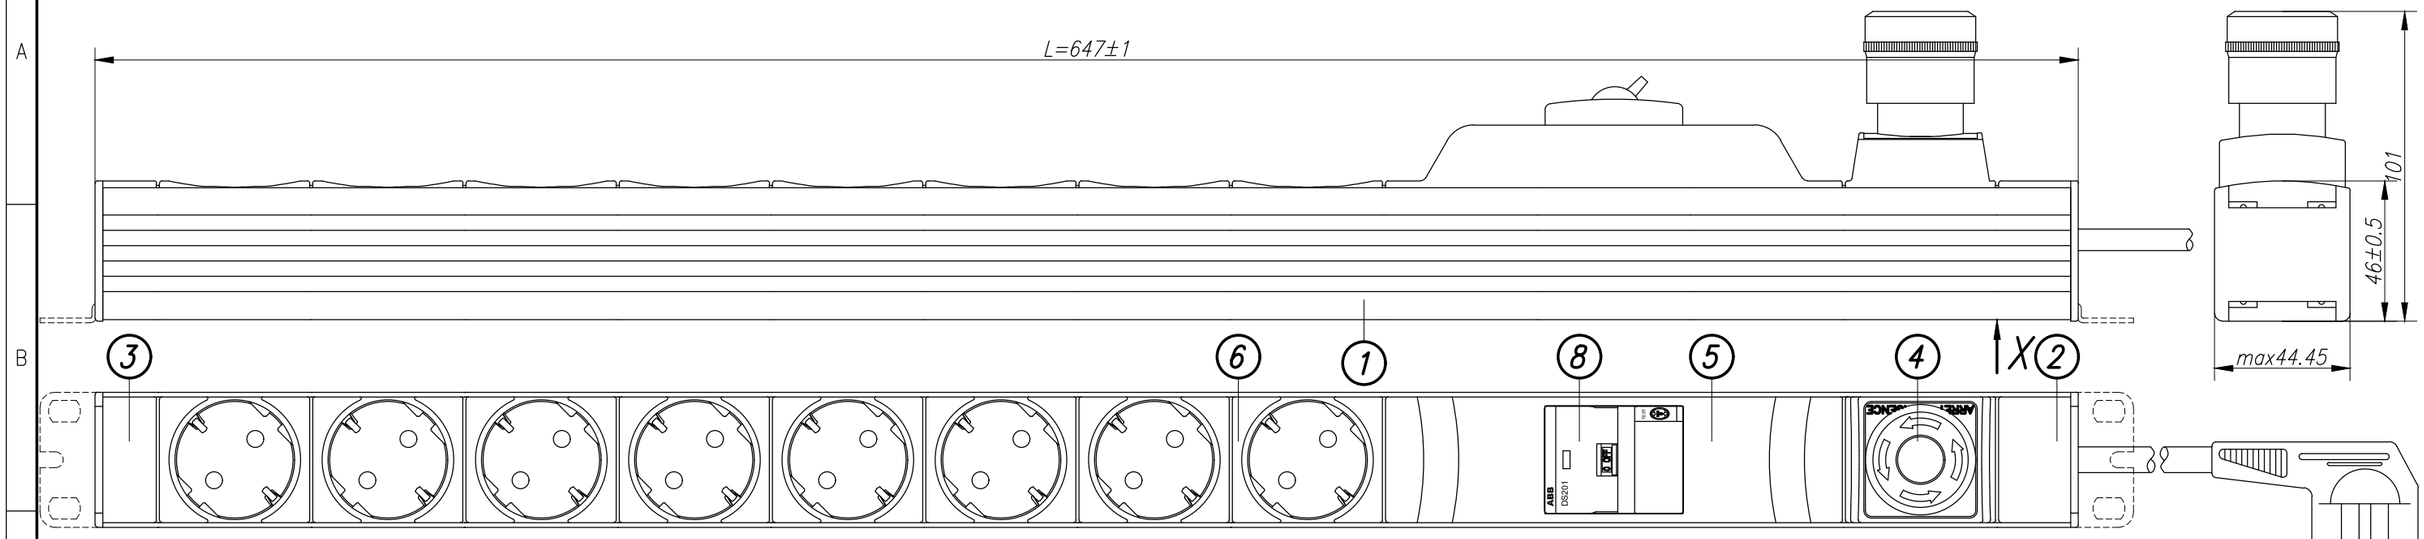

Internal wiring scheme, inlets and outlets shown frontside down

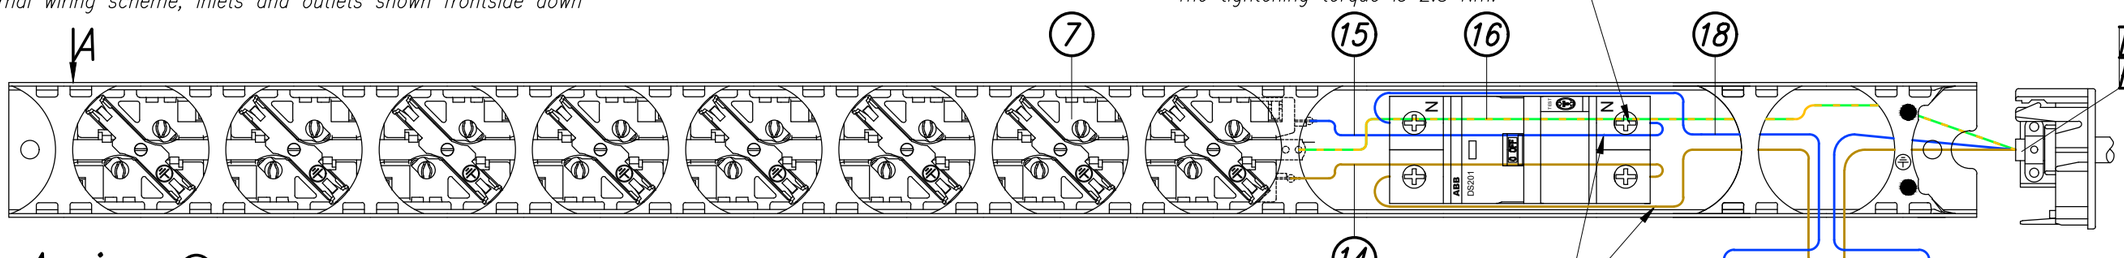

Csavarok meghúzási nyomatéka 2.8 Nm.
The tightening torque is 2.8 Nm.

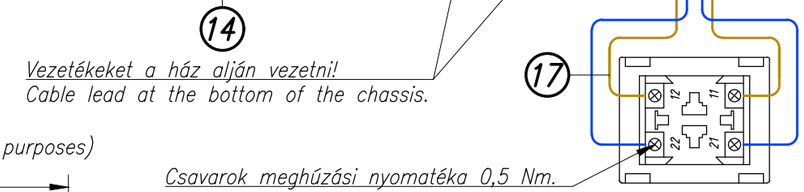

Csavarok meghúzási nyomatéka 0,5 Nm.
The tightening torque is 0,5 Nm.

A view



X view

assembly dimensions (only for information purposes)

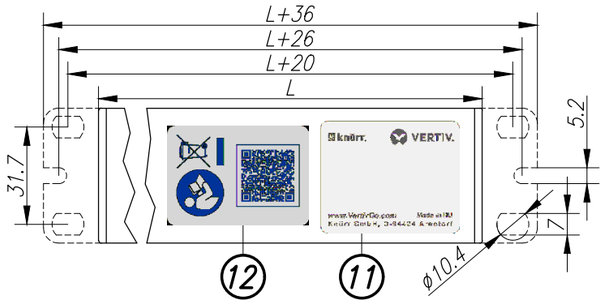

Technical data:
- 8x DIN 49440 SCHUKO socket 16A
- socket spacing 50mm, torsion of sockets 45°
- with residual current circuit-breaker with overcurrent protection, rated residual current 30mA, B characteristic
- with Emergency-Stop switch
- Operating temperature: 0 ... +50 °C

knürr VERTIV.
DI-STRIP
Protector Not-Aus FI/LS
100-240 Vac, 50-60 Hz
max. 16A
Cat. AC-15 (IEC 60947)
GFI: 30mA, LS: B16A
03.328.008.1 YY/MM XXXXXX
www.VertivCo.com Made in HU
Knürr GmbH, D-94424 Arnstorf

14	1	ST	Vezeték barna 1,5mm2	Electric cord brown	8.768.3855	L=160(EO-EV)
15	1	ST	Vezeték kék 1,5mm2	Electric cord blue	8.768.3162	L=160(EO-EV)
16	1	ST	Vezeték zöld-sárga 1,5mm2	Electric cord green-yellow	3.768.3022	L=280(EO-EO)
17	1	ST	Vezeték barna 1,5mm2	Electric cord brown	8.768.4723	L=180 (EV-EV)
18	1	ST	Vezeték kék 1,5mm2	Electric cord blue	8.768.4724	L=180 (EV-EV)

A belső vezetékezés komponensei. / Components of internal wiring.

Load rating:
100-240 Vac, 50-60 Hz
Input: 1x 16 A
Output: 16 A

Approvals/certificates:
- CE marking according to: LVD (low voltage directive), RoHS (restriction of hazardous substances)
- BV-BG certification (factory inspected)

Power cord:
Type: H05VV-F 3x1,5mm², white
Length: 2,5m
Plug: CEE VII/7, DIN49441 Form2

Material/Finish:
Chassis: closed sheet steel extrusion, zincplated, powder-coated texture
Plastic parts: Vampamid 6 0024 VO (UL94) or similar, recyclable
Internal conduction: brass conductor rails and copper wires
Internal copper wires: H07V-K 1,5mm²

Color:
Chassis: RAL7035 light grey
Plastic parts: RAL7035 light grey

Packaging:
Packing box (csomagolódoboz)
Supply schedule:
Socket strip (1 piece)
Mounting bracket (2 pieces) 3.768.2608
User manual (1 piece) 03.300.999.1

Dimensions in mm

Rev.	Change	Date	Name
B	18027	10.08.17	Gali

General tolerances: ISO 2768-m
Finish:
Material:
Sheet: 1/1

	Date	Name
Drawn	09.10.2004	Szebényi
Checked	09.10.2004	Szabó
Approved		

Description: **DIS-EEV CEE7/7-16A 8P ESRCCB**

knürr®
Knürr GmbH Mariakirchener Straße 38
D-94424 Arnstorf Tel: +49 (0) 87 23-27-0

Drawing no.: **03.328.008.1**
Scale:

Gross weight	Net weight	External dimensions of packing box
1,84 kg	1,49 kg	700x140x80 mm

Platine:
File:

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

DI-STRIP