GYS 2400 D4 64 L15 8G

- GYS — GOODRAM PLAY SILVER
- 2400 — SPEED / DATA TRANSFER 2400MHz / PC4-19200
- D4 — MODULE TYPE DDR4 SDRAM DIMM
- 64 — MODULE DATA WIDTH 64
- L15 — CAS LATENCY 15
- 8G — MODULE DENSITY 8GB

DDR IV MODULE PART NUMBERING SYSTEM



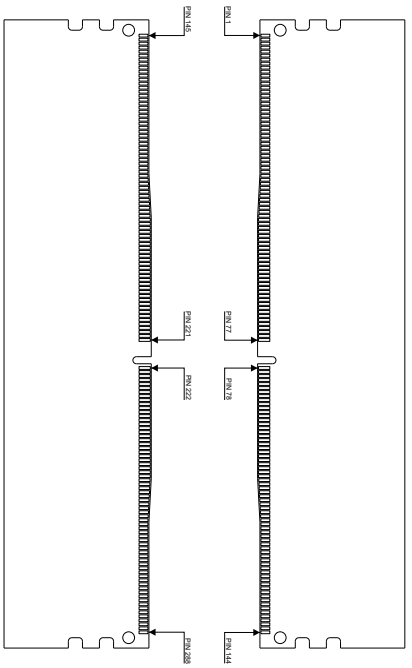

FEATURES

PART NUMBER	GYS2400D464L15/8G
MODULE TYPE	DDR4 SDRAM DIMM
MODULE DENSITY	8GB
MODULE DATA WIDTH	64
DRAM COMPONENT ORAGNIZATION	512Mx8
NUMBER OF DRAM COMPONENTS	16
NUMBER OF MODULE RANKS	2
NUMBER OF MODULE SIDES	2
REGISTERED	NO
ECC SUPPORT	NO
PIN COUNT	288 PIN
SUPPLY VOLTAGE	1,2V
INTERFACE	PSEUDO OPEN DRAIN 1.2V (POD12)

DYNAMIC PARAMETERS FOR 2400MHz

CAS LATENCY	15
RAS# TO CAS# DELAY, tRCD	15
ROW PRECHARGE TIME, tRP	15
ACTIVE TO PRECHARGE TIME, tRAS	35

PCB DETAILS

PCB TYPE	DDR4 SDRAM DIMM
BOARD DIMENSIONS	133,35 x 31,25mm ± 0,1mm
BOARD THICKNESS	1,4mm ± 0,1mm
DRAM PACKAGE INFORMATION	FBGA, x8bit
CONTACT PADS (PIN)	GOLD PLATED

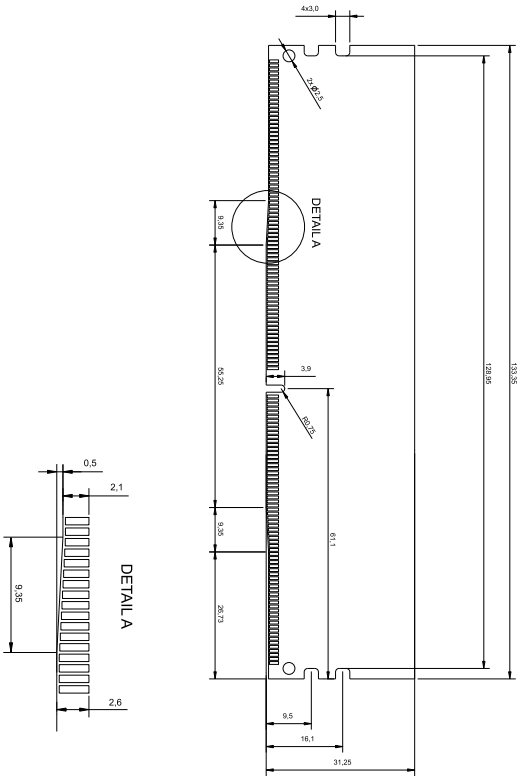

GOODRAM logo is registered trademark of Wilk Elektronik S.A.
All other trademarks and logos are the property of their respective owners.
All products and specifications are subject to change without notice.

Rev. 23.09.2016r.

Wilk Elektronik S.A.
Poland, 43-173 Łaziska Górne, ul. Mikołowska 42
tel.: 0-32/ 736 90 00, fax: 0-32/ 736 90 01
www.wilk.com.pl | www.goodram.com
© Wilk Elektronik S.A. 2016

SPD CONFIGURATION

BYTE	DESCRIPTION	HEX	DEC
0	Number of Serial PD Bytes Written / SPD Device Size / CRC Coverage 1 2	0x23	35
1	SPD Revision	0x10	16
2	Key Byte / DRAM Device Type	0x0c	12
3	Key Byte / Module Type	0x02	2
4	SDRAM Density and Banks	0x84	132
5	SDRAM Addressing	0x19	25
6	SDRAM Package Type	0x00	0
7	SDRAM Optional Features	0x08	8
8	SDRAM Thermal and Refresh Options	0x00	0
9	Other SDRAM Optional Features	0x00	0
10	Reserved -- must be coded as 0x00	0x00	0
11	Module Nominal Voltage, VDD	0x03	3
12	Module Organization	0x09	9
13	Module Memory Bus Width	0x03	3
14	Module Thermal Sensor	0x00	0
15	Extended module type	0x00	0
16	Reserved -- must be coded as 0x00	0x00	0
17	Timebases	0x00	0
18	SDRAM Minimum Cycle Time (tCKAVGmin)	0x07	7
19	SDRAM Maximum Cycle Time (tCKAVGmax)	0x0c	12
20	CAS Latencies Supported, First Byte	0xfc	252
21	CAS Latencies Supported, Second Byte	0x01	1
22	CAS Latencies Supported, Third Byte	0x00	0
23	CAS Latencies Supported, Fourth Byte	0x00	0
24	Minimum CAS Latency Time (tAAmin)	0x64	100
25	Minimum RAS to CAS Delay Time (tRCDmin)	0x64	100
26	Minimum Row Precharge Delay Time (tRPmin)	0x64	100
27	Upper Nibbles for tRASmin and tRCmin	0x10	16
28	Minimum Active to Precharge Delay Time (tRASmin), Least Significant Byte	0xe9	233
29	Minimum Active to Active/Refresh Delay Time (tRCmin), Least Significant Byte	0x4e	78
30	Minimum Refresh Recovery Delay Time (tRFC1min), LSB	0x20	32
31	Minimum Refresh Recovery Delay Time (tRFC1min), MSB	0x08	8
32	Minimum Refresh Recovery Delay Time (tRFC2min), LSB	0x00	0
33	Minimum Refresh Recovery Delay Time (tRFC2min), MSB	0x05	5
34	Minimum Refresh Recovery Delay Time (tRFC4min), LSB	0x70	112
35	Minimum Refresh Recovery Delay Time (tRFC4min), MSB	0x03	3
36	Minimum Four Activate Window Time (tFAWmin), Most Significant Nibble	0x00	0
37	Minimum Four Activate Window Time (tFAWmin), Least Significant Byte	0xa8	168
38	Minimum Activate to Activate Delay Time (tRRD_Smin), different bank group	0x1b	27
39	Minimum Activate to Activate Delay Time (tRRD_Lmin), same bank group	0x28	40
40	Minimum CAS to CAS Delay Time (tCCD_Lmin), same bank group	0x28	40
41-59	Reserved -- must be coded as 0x00	0x00	0
60	Connector to SDRAM Bit Mapping	0x16	22
61	Connector to SDRAM Bit Mapping	0x36	54
62	Connector to SDRAM Bit Mapping	0x16	22
63	Connector to SDRAM Bit Mapping	0x36	54
64	Connector to SDRAM Bit Mapping	0x16	22
65	Connector to SDRAM Bit Mapping	0x36	54
66	Connector to SDRAM Bit Mapping	0x16	22
67	Connector to SDRAM Bit Mapping	0x36	54
68	Connector to SDRAM Bit Mapping	0x00	0
69	Connector to SDRAM Bit Mapping	0x00	0
70	Connector to SDRAM Bit Mapping	0x2b	43
71	Connector to SDRAM Bit Mapping	0x0c	12
72	Connector to SDRAM Bit Mapping	0x2b	43
73	Connector to SDRAM Bit Mapping	0x0c	12
74	Connector to SDRAM Bit Mapping	0x2b	43
75	Connector to SDRAM Bit Mapping	0x0c	12
76	Connector to SDRAM Bit Mapping	0x2b	43
77	Connector to SDRAM Bit Mapping	0x0c	12

GOODRAM logo is registered trademark of Wilk Elektronik S.A.
All other trademarks and logos are the property of their respective owners.
All products and specifications are subject to change without notice.

Rev. 23.09.2016r.

Wilk Elektronik S.A.
Poland, 43-173 Łaziska Górne, ul. Mikołowska 42
tel.: 0-32/ 736 90 00, fax: 0-32/ 736 90 01
www.wilk.com.pl | www.goodram.com
© Wilk Elektronik S.A. 2016

SPD CONFIGURATION

BYTE	DESCRIPTION	HEX	DEC
78-116	Reserved -- must be coded as 0x00	0x00	0
117	Fine Offset for Minimum CAS to CAS Delay Time (tCCD_Lmin), same bank group	0x00	0
118	Fine Offset for Minimum Activate to Activate Delay Time (tRRD_Lmin), same bank group	0x9c	156
119	Fine Offset for Minimum Activate to Activate Delay Time (tRRD_Smin), different bank group	0xb4	180
120	Fine Offset for Minimum Activate to Activate/Refresh Delay Time (tRCmin)	0x4e	78
121	Fine Offset for Minimum Row Precharge Delay Time (tRPmin)	0xf6	246
122	Fine Offset for Minimum RAS to CAS Delay Time (tRCDmin)	0xf6	246
123	Fine Offset for Minimum CAS Latency Time (tAAmin)	0xf6	246
124	Fine Offset for SDRAM Maximum Cycle Time (tCKAVGmax)	0x00	0
125	Fine Offset for SDRAM Minimum Cycle Time (tCKAVGmin)	0xd6	214
126	CRC for Base Configuration Section, Least Significant Byte	0x1c	28
127	CRC for Base Configuration Section, Most Significant Byte	0x2e	46
128-511	Module Specific Data		

GOODRAM logo is registered trademark of Wilk Elektronik S.A.
All other trademarks and logos are the property of their respective owners.
All products and specifications are subject to change without notice.

Rev. 23.09.2016r.

Wilk Elektronik S.A.
Poland, 43-173 Łaziska Górne, ul. Mikołowska 42
tel.: 0-32/ 736 90 00, fax: 0-32/ 736 90 01
www.wilk.com.pl ı www.goodram.com
© Wilk Elektronik S.A. 2016