

MASTER LEDspot LV

MAS LEDspotLV D 6.5-35W 930 MR16 60D

Delivering intense accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot light. Thanks to its high CRI, it realize more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. MASTER LEDspot LV is compatible with most existing fixtures with a MR16 GU 5.3 holder and designed as a retrofit replacement for halogen or incandescent spots. Not only it employ Philips' patented solution to guarantee the broadest possible compatibility with standard 12V halogen electronic transformers, it also delivers high beam intesity which equivalent to halogen MR16 spots. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers. MASTER LEDspot LV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling residential owners and business owners to achieve a return on their investment within short period time with its efficiency energy use and long life time.

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal Lifetime (Nom)	40000 h
Switching Cycle	50000X
Technical Type	6.5-35W

Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	60 °
Light Distribution	Wide beam 60°
Luminous Intensity (Nom)	460 cd
Color Designation	White (WH)
Rated Beam Angle	60 °
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (rated) (Nom)	56.92 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux In 90° Cone (Rated)	370 lm

Operating and Electrical	
Power (Rated) (Nom)	6.5 W
Lamp Current (Nom)	720 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7

MASTER LEDspot LV


Voltage (Nom)	12 V
Temperature	
T-Case Maximum (Nom)	92 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A
Energy Consumption kWh/1000 h	7 kWh

Product Data	
Full product code	871869669862400
Order product name	MAS LEDspotLV D 6.5-35W 930 MR16 60D
EAN/UPC - Product	8718696698624
Order code	929001153532
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001153532
Net Weight (Piece)	0.045 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Dimensional drawing

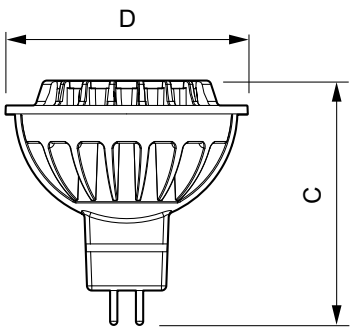

LED D 7-35W 830 MR16 60D

Product	**D**	**C**
MAS LEDspotLV D 6.5-35W 930 MR16 60D	50.5 mm	50.5 mm

Photometric data

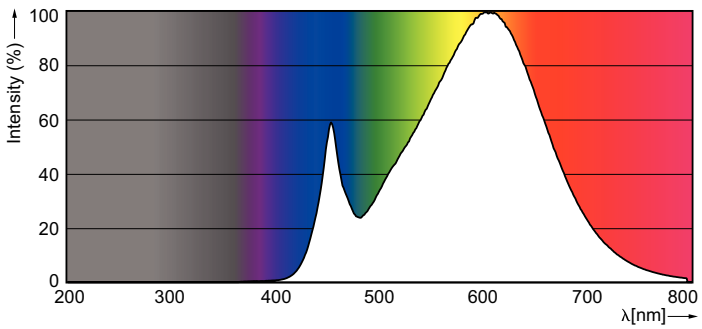



© 2017 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com
2017, March 3 - data subject to change