LED MR11 GU4 3.3W-25W ND 2700K 35D 250lm

- GU4 Socket
- 12 AC/DCV
- 20,000 hours Lifetime
- 88% Energy Saving
- Luminous Flux: 205 lm
- Equivalent to 20W incandescent bulb

Product Number	**52648**
General Data	
Lamp Socket	GU4
Electric Data	
Wattage (W)	2.5
Wattage Equivalent (W)	20
Voltage (V)	12V AC/DC
Dimmable	no
Power Factor	0.7
Operating Frequency (Hz)	50/60
Geometric Data	
Length (mm)	40
Diameter (mm)	34
Weight (g)	15
Photometric Data	
Luminous Flux (lm)	205
Luminous Flux 90° Cone (lm)	185
CRI	80
CCT (K)	2700
Luminous Intensity (cd)	500
Beam Angle (º)	35
Luminous Efficacy (lm/W)	82
Lifetime (hrs)	20,000
Switching Cycle	100,000









17/07/2017

Lifestyle image



Photometric Diagrams

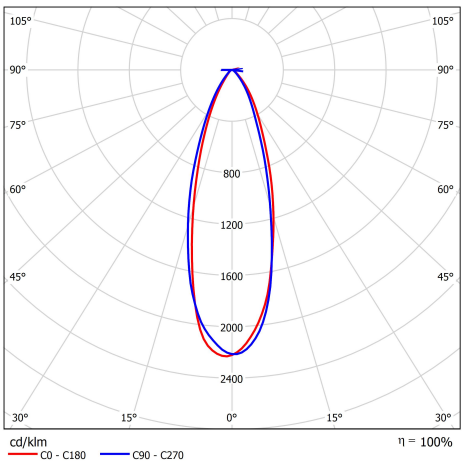

A Group Company of MITSUBISHI CHEMICAL

Verbatim™

Photometric Diagrams

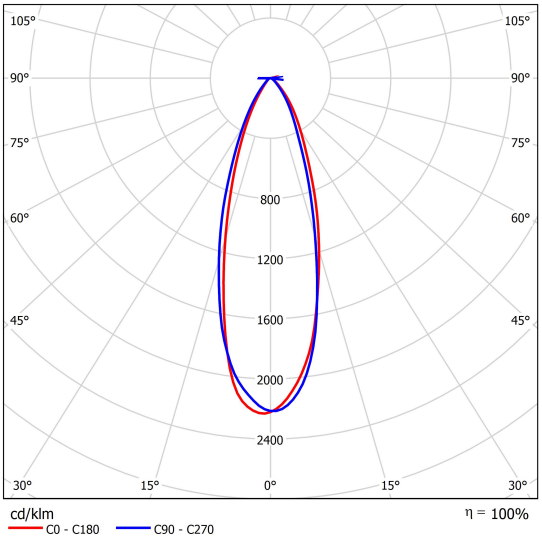

Energy Rating

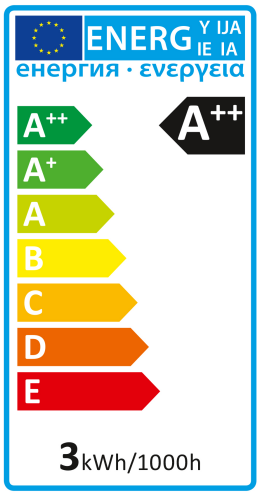

Technical Packaging Details

Barcode
023942526483

EAN 128
(02)00023942526483(37)06(91)14

EAN 14
50023942526488

Pack Dimensions(HxWxL)
144 x 56 x 102 (mm)

Pack Weight
33 (g)

MOQ
6

Carton Dimensions (HxWxL)
145 x 113 x 190 (mm)

Cartons/Pallet
198

Layers/Pallet
6

Units/Pallet
1188

17/07/2017