WL-EPT650-200



Display size
42"-75"

Max load
175lb (79kg)

Wireless Outdoor Tilt Wall Mount

FOR 42" TO 75" DISPLAYS

Peerless-AV's Wireless Outdoor Tilt Wall Mount is a weather-resistant, corrosion-free outdoor wireless package that delivers plug-and-play, Full HD 1080p and passive 3D wireless content streaming or game play to any outdoor space without the need for costly drilling and pulling of signal cables through walls, floors or ceilings. This full-featured wireless mounting solution provides tilt angle adjustment for the optimum viewing experience and reverse IR functionality that enables remote components to be controlled at the site of the display.

WL-EPT650-200's adjustable tilt settings enable you to find the perfect viewing angle for your specific application.

GET IT RIGHT™

Additional Features

- ☑ Includes everything needed to mount and stream wireless Full HD 1080p and passive 3D content to the mounted display through walls, floors or ceilings
- ☑ Provides excess display power and wireless component cable storage for a clean look
- ☑ Built-in 3-tap grounded outlet for wireless components and display power allowing for only one power cable to be routed to the power outlet
- ☑ +15°/-5° tilt* with 5° locking increments
- ☑ Horizontal display adjustment up to 8" (203 mm) for ideal display position on the wall
- ☑ Accommodates installations to 16", 20" and 24" stud centers
- ☑ Quick and easy installation and plug-and-play wireless set-up

* Tilt angle depends on the position of the wireless enclosure



EASY DISPLAY CENTERING
8" (203mm) of horizontal adjustment for ideal display position

WIRELESS FULL HD 1080P AND 3D STREAMING
Cable-free, high-definition and passive 3D signal streaming up to 131ft (40m) through floors, walls and ceilings

CLEAN INSTALLATION
Provides 3-tap grounded outlet for wireless components and display power allowing for only one power cable to be routed to the power outlet

VIEWING ANGLE FLEXIBILITY
Adjustable tilt settings enable the best viewing angle



Includes everything needed to quickly and easily stream wireless content to the outdoor display without the need to run signal cables



Supports all wireless components and power in a weather resistant enclosure



Provides an ultra sleek wireless content delivery system with no long and costly cable runs

Patented. Utility Patent No, 8,517,322.

info@peerless-av.com
peerless-av.com

peerless-AV®

Model Numbers

WARRANTY: Limited 5-year

WL-EPT650-200	Wireless Outdoor Tilt Wall Mount for 42" to 75" Displays

Product Specifications

PART NUMBER	WL-EPT650-200
DISPLAY SIZE	42" to 75"
MAX LOAD	175lb (79kg)
UNIVERSAL MOUNTING PATTERN (W x H)	738 x 405mm (29.04" x 15.95")
VESA® MOUNTING PATTERN	600 x 400mm
DISTANCE FROM WALL	6.20" (158mm)
TILT	+15/-5° with 5° lock increments (tilt angle depends on placement of the wireless components)
PRODUCT WEIGHT	15.35lb (6.96kg)
FINISH	Outdoor powder paint (mount), Textured ABS plastic, UL 94HB (Wireless Integration Module)
COLOR	Black

WIRELESS RANGE	131ft (40m)
VIDEO INPUT (TRANSMITTER)	2 x HDMI up to 1080p (60Hz), 1920x1080 1 x Composite 1 x YPbPr Component
VIDEO OUTPUT (RECEIVER)	1 x HDMI up to 1080p (60Hz), 1920x1080 1 x Composite 1 x YPbPr Component
AUDIO	2 Ch. Linear PCM, Analog, 48kHz 16-bit ADC
AUDIO INPUT	1 x 3.5mm Audio Jack (Transmitter)
AUDIO OUTPUT	1 x 3.5mm Audio Jack (Receiver)
WIFI FREQUENCY	5.15-5.25GHZ
LATENCY	< 30MS
POWER	Voltage 120 VAC, Consumption: 12V 2A


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
WL-EPT650-200	35.250" x 21.188" x 5.438" (895.35 x 538.23 x 138.18mm)	21.50lb (9.72kg)	735029292821	· Outdoor Tilt Wall Mount · Outdoor Weather Resistant Enclosure · Wireless Transmitter with stand · Wireless Receiver · Remote control · 2 x 12V 2A power supply · IR Flasher · IR Extender · 15-Pin D-Sub to RCA female component video breakout cable · 2.5ft (.75m) HDMI cable · 4 x Mounting brackets (2 short, 2 long) · 4ft (1.2m) Cable management sheath · 3-tap grounded outlet · Removable sub-panel · Mounting hardware · Instruction manual	1


Accessories

CL models: Outdoor Displays
HDS-200R: HD Flow™ Pro Wireless Multimedia Receiver
HDS-ASE: Wireless TX/RX Security Enclosure for use with HD Flow™ Pro Models

All dimensions = inch (mm)

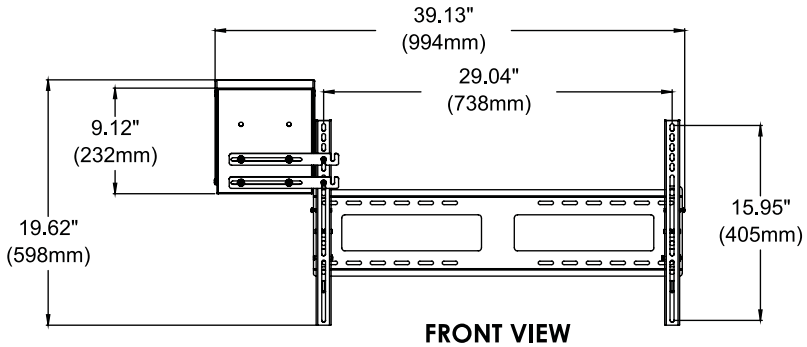

FRONT VIEW



SIDE VIEW

Architect Specifications

The Wireless Outdoor Tilt Wall Mount shall be a Peerless-AV model WL-EPT650-200 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV®

LIT-0781 rev2

© 2014 Peerless Industries, Inc. Peerless-AV® is a registered trademark of Peerless Industries, Inc. All rights reserved.