LED IP20 Batten 9W 4000K 900lm Non-Linkable

Integral Value+ IP20 LED battens are perfect for work benches, shelving areas and stock rooms. At 100Lm/W these LED battens are an ideal replacement for traditional fluorescent tube lights, providing energy savings over their lifetime.

Product Details

Partcode: ILBTC036

Check Code: 178231

Range Name: Value+

Placement / Application: Indoor, General Lighting

Product Type: Battens

Warranty: 3 Years

CE / RoHS: Yes

Physical Data

Base Colour: Matt white

Optic: Polycarbonate diffuser

Material: Polycarbonate

Construction: Injection moulding

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Physical Data

Length: 600mm

Width: 27mm

Depth: 35mm

Weight (Unpackaged Single Unit): 121g

Lamp or Luminaire Shape: Linear

Luminaire Fixing: Wall/Ceiling mounted

Electrical Data

Voltage Range: 90-265V

Power Consumption: 9.0 Watts

Driver included: Yes

Electric Current: AC

Frequency Range: 50Hz Hz

Power Factor: >=0.90

Wattage Equivalent: 14 Watts

Dimming: Non-dimmable

LVD Certified: Yes

EN: EN-60598

Light Data

Useful Lumens: 900lm (Rated luminous flux in a 90° cone)

Lumens: 900lm

Lumens per Watt: 100.0lm/W

Beam Angle: 130º

Correlated Colour Temperature (CCT): 4,000k

Colour Temperature: Cool White

Colour Rendering Index (CRI): >=80

LED Type: Surface mounted device (SMD)

LED Size: 2835


Instant on - Less than 1 second: Yes

Lifetime: 30,000 hrs

Switching Cycles: >20,000 X

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Environmental

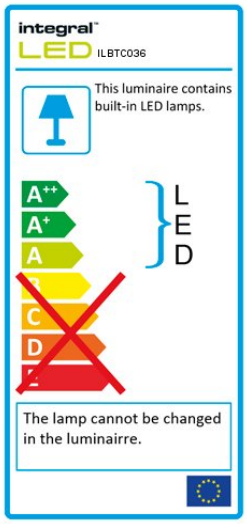

Lowest Operating Temperature: -10 degrees

Maximum Operating Temperature: 40 degrees

IP (Ingress Protection) Rating: IP20

Hg 0% (Mercury Free): Yes

Packaging

EAN Barcode (unit of 1): 5055788229469

Packaged Weight (Unit of 1): 203g

Length (unit of 1): 635mm

Width (unit of 1): 30mm

Depth (unit of 1): 45mm

Outer packaging info available on website

Product data last updated on: Monday, February 12, 2018 - 16:21

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE