HANNspree

HO 320 HTB
32” Open Frame Touch Monitor

Experts in **Display**

Open Frame Touch Monitor

HO 320 HTB

31.5” / 80cm Diagonal
LED Backlight – Format 16:9

- 1920 x 1080 Full HD 1080P Resolution
- 10-Point Touch P-Cap Technology
- 178° / 178° Ultra Wide Viewing Angle
- 1400:1 High Contrast Ratio
- Video Input: HDMI + VGA
- **IP54 (front) Rating Level**
- **Display Protection: Thickness 4mm**
- Multiple Mounting Options
- ≥6H Toughened Hard Panel Surface
- Slim Profile with Narrow Edges
- Touch-Through Glass
  (available upon request*)





HDMI Cable

Touch through glass

4.0mm
Display Protection

Full HD
1920x1080

31.5” / 80 cm

Part. No..: HO 320 HTB

SIZE, RESOLUTION	CONNECTIVITY, IP LEVEL	VIEWING ANGLE, TOUCH	OTHER FEATURES
32” VIEWABLE SCREEN — 32” 16:9 Aspect Ratio	HDMI VGA	178 ULTRA-WIDE VIEWING ANGLE — 178 Ultra-Wide Viewing Angle	LOW POWER CONSUMPTION — Low Power Consumption
1920x1080 RESOLUTION — Full HD 1920 x 1080	IP54 — IP 54 Water & Dust Protection	10-POINT TOUCH — 10 Point Touch	Backlight LIFETIME — 30.000 Hours Lifetime

Display Solutions

Technical Specifications >>>

* For more details contact your local HSP office / representative or send us a request via the product enquiry form on the website.

HANNspree

HO 320 HTB
32” Open Frame Touch Monitor

Experts in Display

Display Size	80 cm / 31.5“ Diagonal
Panel Type	TFT – LED Backlight
Aspect Ratio	16:9
Resolution (H x V)	1920 x 1080 Full HD
Brightness (Typ.)	350cd/m² Panel / 300 cd/m² Monitor
Contrast (Typ.)	1.400:1 (Typical)
Display Area	698,4 x 392,85 mm
Viewing Angle L/R; U/D	178° H / 178° V
Response Time	8 msec
Pixel Pitch	0,364 (H) x 0,364 (V) mm
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass
Display Colors	16.7M Colors
Horizontal Frequency	30 ~ 83 kHz
Vertical Frequency	60 Hz
Max Display Frequency	1920 x 1080 @ 60Hz
Input 1	VGA
Input 2	HDMI
Input 3	USB Type B (Touch)
Input 4	-
Power Consumption	On: 37.71W; Stand-by: 0.3W; Off: -
AC Power Range	AC 100 ~ 240 Volt; 50 ~ 60 Hz
Product Dimensions	766 x 54 x 459 mm (W x D x H)
Packing Dimensions	85 x 24.8 x 57 cm (W x D x H)
Net / Gross Weight	14 Kg / 16 Kg

VESA Mounting	-
Display Protection	Thickness 4±0.3 mm
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%
IP Rating Level	IP 54 (Front), Water and Dust Protection *
Controls	Power, Auto, (+), (-), Menu
LED Backlight life	30.000 hours
Accessory	Power supply; HDMI Cable (1.5m); USB Cable for Touch.
Certifications	CE, RoHS
On Screen Display	9 Languages

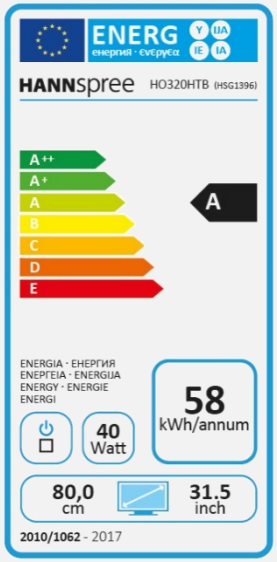

Supplier’s Name	HANNspree
Model Name	HO320HTB
Energy Efficiency Class	A
Screen Size (Centimetres)	80
Screen Size (Inches)	31,50
On mode power Consumption (W)	40
Annual Energy Consumption* (kWh)	58
Standby-mode Power Consumption (W)	0,30
Off-mode Power Consumption (W)	-
Screen Resolution	1920 x 1080

PART. NO.:
HO 320 HTB

4 711404 022609 >

© 2019 HANNSpree, Inc. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNspree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

* IP54: The IP Code classifies how resistant a device is to foreign objects and moisture.
IP54 means that the monitor will operate in dusty conditions, and will resist splashing water.

HANNspree

HO 320 HTB
32” Open Frame Touch Monitor

Experts in Display

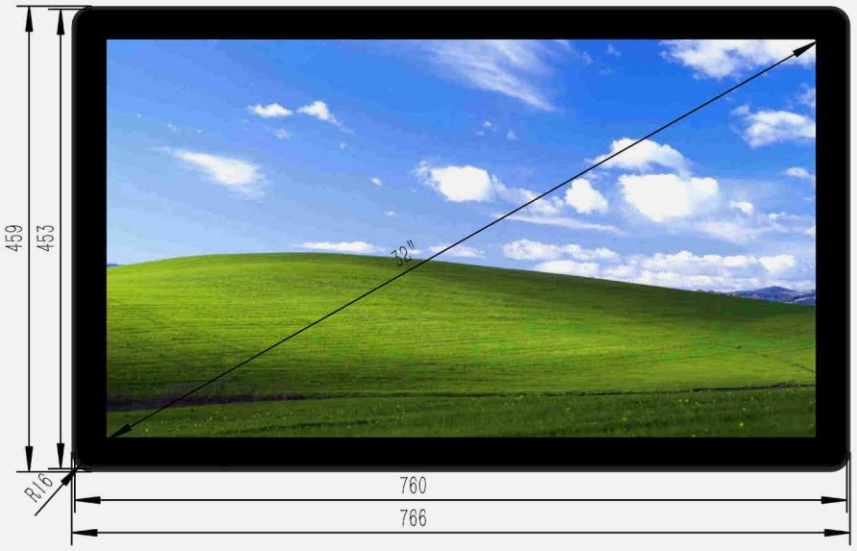



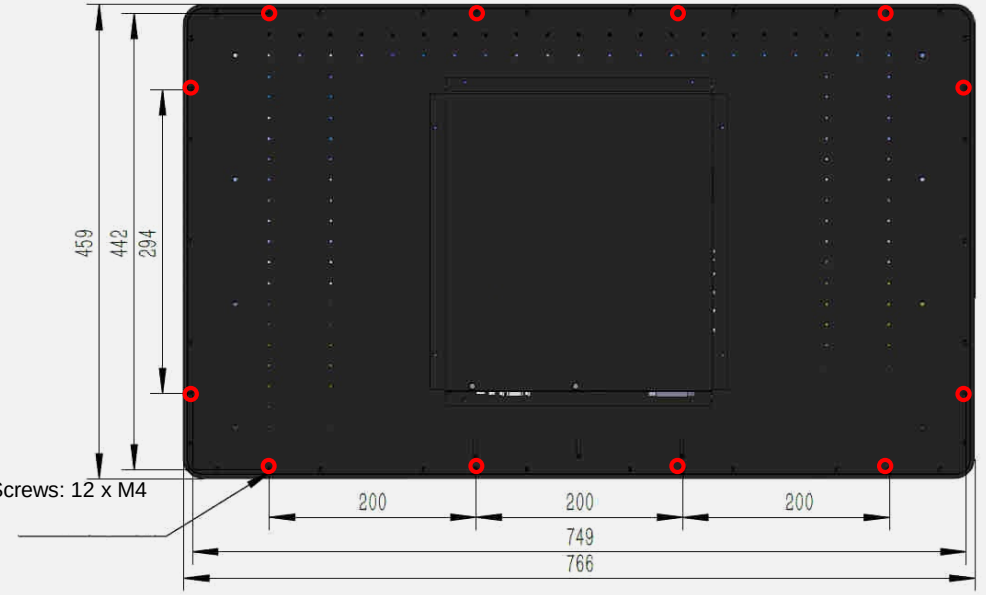

Screw hole spec: 12 x M4 10mm lenght, pitch: 0.7.

