Verbatim LED GU10 6W 3000K 430lm

- GU10 Socket
- 220-240V
- 40,000 hours Lifetime
- Dimmable
- 90% Energy Saving
- Luminous Flux 90° Cone: 430 lm
- Equivalent to 61W incandescent bulb







Product Number	**52307**
General Data	
Lamp Socket	GU10
Design	PAR16 GU10
Electric Data	
Wattage (W)	6.0
Wattage Equivalent (W)	61
Voltage (V)	220-240
Dimmable	yes
Power Factor	≥0.7
Operating Frequency (Hz)	50/60
Geometric Data	
Length (mm)	56
Diameter (mm)	50
Weight (g)	55
Photometric Data	
Luminous Flux (lm)	450
Luminous Flux 90° Cone (lm)	430
CRI	80
CCT (K)	3000
Luminous Intensity (cd)	1100
Beam Angle (º)	35
Luminous Efficacy (lm/W)	75
Lifetime (hrs)	40,000
Switching Cycle	100,000

Product image



Application image



Energy Rating

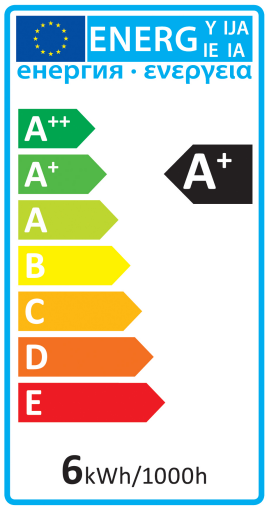

Technical Packaging Details

Barcode
023942523079

EAN 128
(02)00023942523079(37)10(91)814

EAN 14
50023942523074

Pack Dimensions(HxWxL)
H67 *W51*L51mm (mm)

MOQ
10

Carton Dimensions (HxWxL)
H97*W125 *L285mm (mm)

Cartons/Pallet
171

Layers/Pallet
9

Units/Pallet
1710

Photometric Diagrams

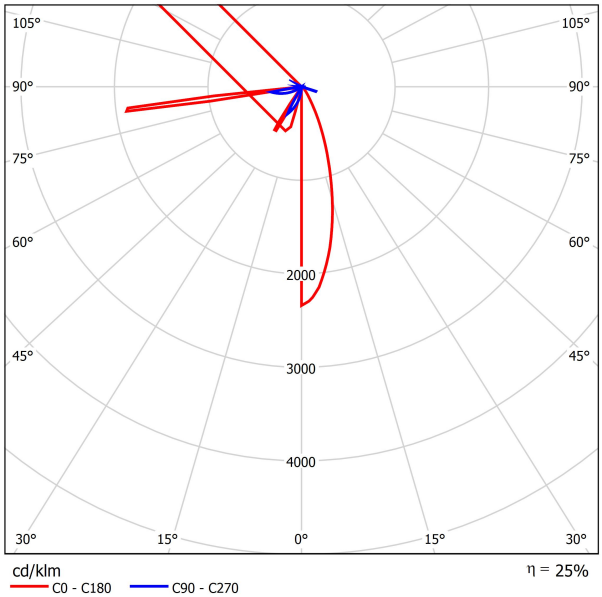

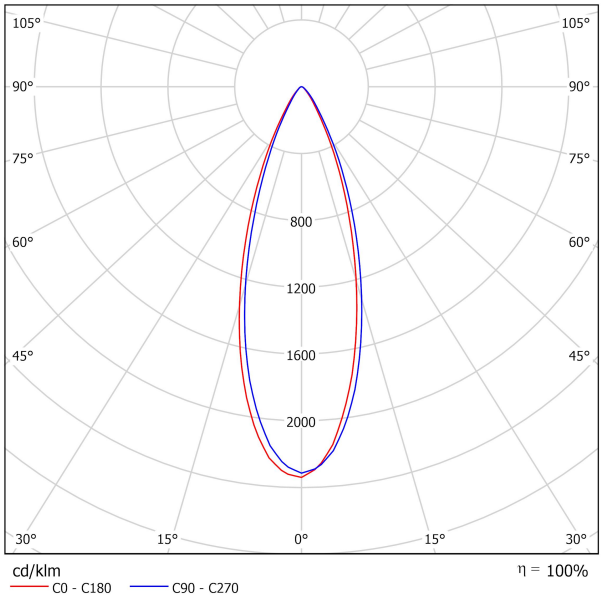

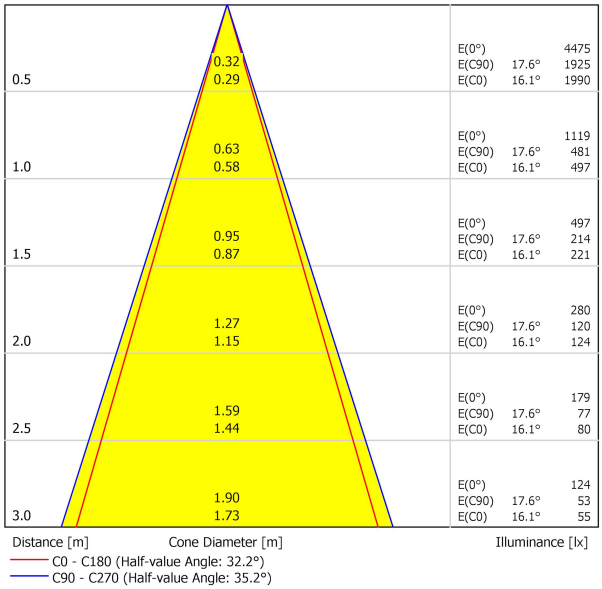
0.5
0.32
0.29
E(0°) 4475
E(C90) 17.6° 1925
E(C0) 16.1° 1990
1.0
0.63
0.58
E(0°) 1119
E(C90) 17.6° 481
E(C0) 16.1° 497
1.5
0.95
0.87
E(0°) 497
E(C90) 17.6° 214
E(C0) 16.1° 221
2.0
1.27
1.15
E(0°) 280
E(C90) 17.6° 120
E(C0) 16.1° 124
2.5
1.59
1.44
E(0°) 179
E(C90) 17.6° 77
E(C0) 16.1° 80
3.0
1.90
1.73
E(0°) 124
E(C90) 17.6° 53
E(C0) 16.1° 55
Distance [m]
Cone Diameter [m]
Illuminance [lx]
C0 - C180 (Half-value Angle: 32.2°)
C90 - C270 (Half-value Angle: 35.2°)