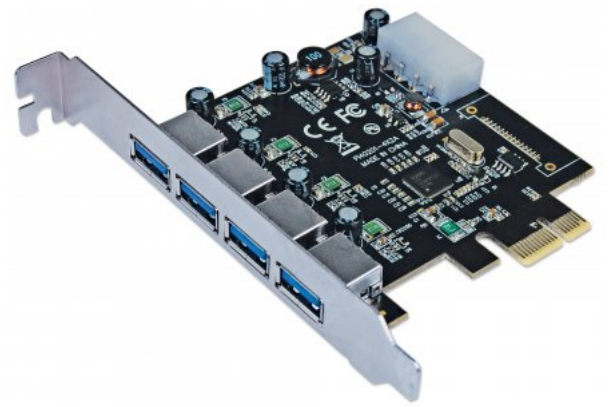

4-Port SuperSpeed USB PCI Express Card

USB 3.0, PCIe 2.0, Standard Profile Bracket

Part No.: 152891

Create a computing platform that balances cost, performance and compatibility. Today's computers can take full advantage of SuperSpeed USB and PCI efficiency with the Manhattan 4-Port SuperSpeed USB PCI Express Card. Easy to install and even easier to use, this device adds four lateral USB ports to a desktop PC. Each port can provide up to 900 mA of power to connect more USB devices and improve convenience. With data transfer speeds of up to 5 Gbps and hot-swap capability, the Manhattan 4-Port SuperSpeed USB PCI Express Card ensures that connected USB peripherals operate at peak performance.

Features:

- Adds four external side-by-side SuperSpeed USB ports
- Supports data transfer rates of up to 5 Gbps and power per port at up to 900mA
- Powered by PCIe slot with optional built-in 4-pin Molex power connector
- Backward compatible with earlier USB versions (USB 2.0/1.1/1.0)
- Works with various types of USB devices including hubs, removable drives, digital cameras, scanners, CD-RWs, DVD-ROMs, PC video cameras and printers
- Plug-and-play installation with Windows 8 and newer; hot-swappable
- Three-year warranty

Specifications:

Standards and Certifications
• USB 3.0
• PCI Express 2.0
• FCC
• RoHS
• CE
• WEEE

General

For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.

• Port Specifications
Data transfer rate: up to 5 Gbps
Up to 900 mA power per port to attached devices
• Bus Specifications
Renesas NEC uPD720201 chipset
PCI 32-bit and 64-bit interface

Connections
• Four USB A female, 9-pin (output)
• One Molex power male, 4-pin (input)
• One PCI Express x1 male (input)

Physical
• Dimensions: 12.1 x 2.3 x 13 cm (4.75 x 0.9 x 5.1 in.)
• Weight: 0.12 kg (0.3 lbs.)

Operating Environment
• Operation Temperature: 0 – 40°C (32 – 104°F)
• Storage Temperature: -20 – 60°C (-4 – 140°F)
• Humidity (noncondensing): 0 – 96%

System Requirements
• Windows XP/Server 2003/Vista/7/8.1/10, Linux kernel 2.6.31 or newer
• Available PCIe slot

Package Contents
• 4-Port SuperSpeed USB PCI Express Card
• Driver CD
• Quick Instruction Guide

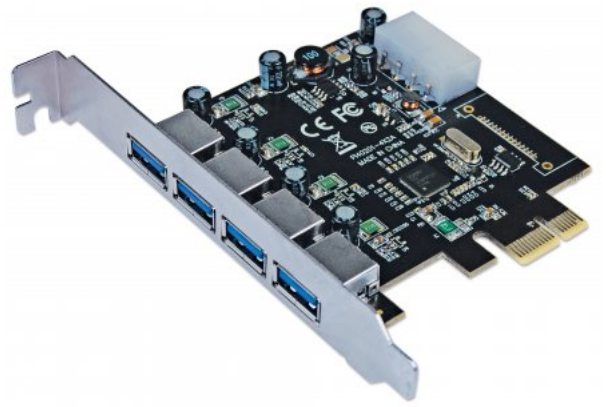

For more information on Manhattan products, consult your local dealer or visit www.manhattan-products.com.
All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.