
AKR 891 IX

12NC: 857889101000

GTIN (EAN) code: 8003437956546

Whirlpool
SENSING THE DIFFERENCE



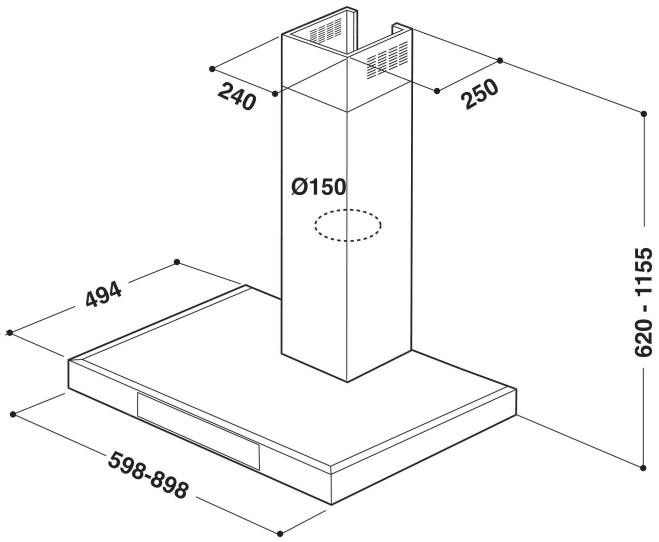

- 6TH Sense technology
- Maximum noise level 61 dBA
- Noise Level (min. - max.): 51-62 dBA
- Air Flow (min. - max.): 224, 448, booster 537 m3/h
- Maximum extraction rate: 448 (m3/h)
- Energy class D
- Speeds: 4 + Booster
- Odour Filter
- 2 Halogen, 40 W lamps
- 1 x 175 W motor
- Electronic Touch control
- 1 Washable aluminium filter
- Grease Filtering Efficiency Class: D
- Lighting Efficiency Class: E
- Fluid Dynamic Efficiency Class: D
- Filter Saturation Indicator
- Operating Mode: Air extraction, Recirculating air

Whirlpool wall mounted cooker hood - AKR 891 IX

This Whirlpool wall mounted Cooker Hood features: dishwasher-safe, washable aluminium grease filters. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. Between 60cm and 90cm wide appliance. Exclusive 6th SENSE sensor technology that dynamically adjusts energy consumption, depending on what your are cooking. New design ensuring extra silent performance.

Electronic control
Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.

6th sense
Exceptional energy savings. The exclusive 6th SENSE technology allows your hood to dynamically adjust its energy consumption, based on what your are cooking.

Carbon Filter Included
Enjoy fresh air in your kitchen, always. This Whirlpool Hood includes a carbon purifying air filter, that effectively protects your kitchen from odours and grease.

4 Speeds
Versatile performance. This Whirlpool Hood offers 4 speed options, giving you complete control over the extraction rate.

Super Silent
Silent efficiency. This Whirlpool Hood is designed to operate at low noise-levels, so you can enjoy some extra peace and quiet.

Wall-mounted installation
Wall-mounted installation. This wall-mounted Whirlpool Hood is a breeze to install.

Total annual energy consumption
Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.

Flexible Installation
Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.

Grease Filter
Odour-free cooking. This Whirlpool Hood features an efficient grease filter, that protects your kitchen surfaces and ensures pleasant, odour-free cooking.

AKR 891 IX

12NC: 857889101000

GTIN (EAN) code: 8003437956546


Whirlpool
SENSING THE DIFFERENCE

MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Stainless steel
Colour chimney	-
Material chimney	-
Typology	Wall-mounted
Installation type	Wall-mounted
Type of control	Electronic
Type of control settings	-
Decor panel options	N/A
Motor location	Integrated motor in hood chimney
Operating Mode	Convertible
Electrical connection rating (W)	215
Current (A)	0,9
Voltage (V)	220-240
Frequency (Hz)	50/60
Length of Electrical Supply Cord (cm)	150
Plug type	Schuko
Chimney height (mm)	85-620
Height of product, without chimney (mm)	80
Height of the product	1155
Width of the product	898
Depth of the product	494
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	23.3

TECHNICAL FEATURES

Type of manual control devices	Touch control
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	175
Number of speed settings: boost option availability	4
Boost presence	Yes
Maximum output air extraction (m^3/h)	593
Boost position air extraction (m^3/h)	593
Maximum output recirculating air (m^3/h)	382
Boost position output recirculating (m^3/h)	382
Light Control Type	On/Off
Number of lights	2
Type of lamps used	Halogen
Total power of the lamps (W)	40
Diameter of air outlet (mm)	150
No-return airflow flap	Yes
Grease filter material	Washable aluminium
Odour filter	Yes

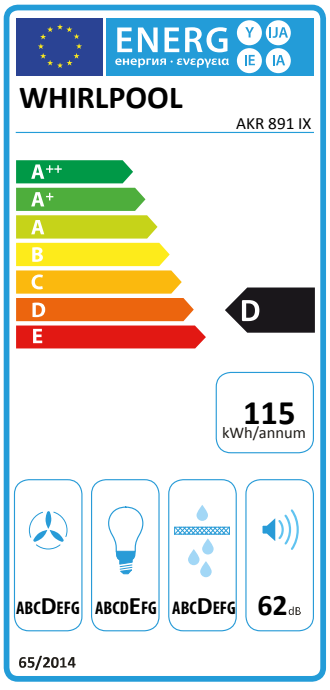

PERFORMANCES

Sound power at min. speed (2010/30/EU)	51
Sound power at max. speed (2010/30/EU)	62
Noise level with boost position (dB(A) re 1 pW)	0