
AKR 650/1 IX

12NC: 859991551210

GTIN (EAN) code: 8003437236563

SENSING THE DIFFERENCE



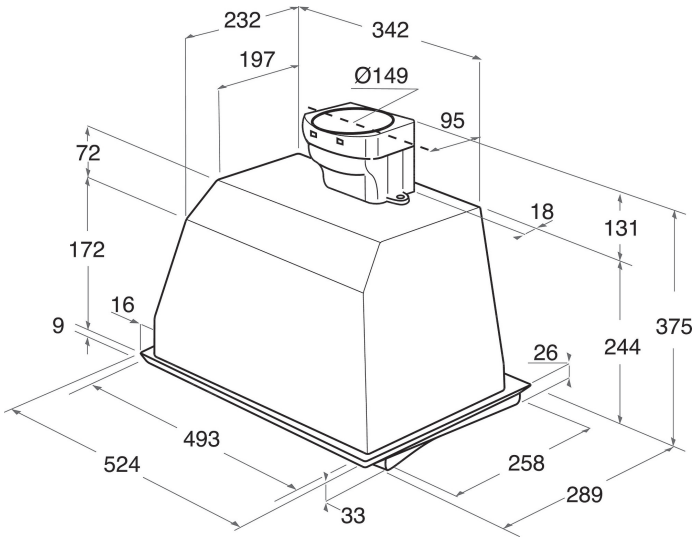

- Maximum noise level 70 dBA
- Noise Level (min. - max.): 46-70 dBA
- Air Flow (min. - max.): 225, 600 m3/h
- Maximum extraction rate: 600 (m3/h)
- Energy class C
- Speeds: 4 + Booster
- Integrated controls
- 2 LED, 10 W lamps
- 1 x 200 W motor
- Mechanical Slider
- 1 Washable aluminium filter
- Grease Filtering Efficiency Class: C
- Lighting Efficiency Class: A
- Fluid Dynamic Efficiency Class: D
- Operating Mode: Air extraction, Recirculating air
- Inox Finishing
- 1 Motor

Whirlpool integrated cooker hood - AKR 650/1 IX

This Whirlpool integrated Cooker Hood features: dishwasher-safe, washable aluminium grease filters. LED lights for ideal lighting. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. Less than 60cm wide appliance. New design ensuring extra silent performance.

LED lighting
Increased energy and cost efficiency. The LED lighting system lasts 10 times longer than traditional bulbs and uses 90% less energy.

Flexible Installation
Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.

Mechanical control
Effortless control. This Whirlpool Hood includes an analogue control interface designed for simplicity and ease-of-use.

4 Speeds
Versatile performance. This Whirlpool Hood offers 4 speed options, giving you complete control over the extraction rate.

Built-in installation
The perfect fit. This built-in Whirlpool Hood is easy to install, and designed to fit in perfectly with your kitchen layout.

Total annual energy consumption
Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.

TIMER
Perfect timing. This Whirlpool Hood includes an intuitive timer, for added convenience.

Fully integrated
An integrated hood - perfect for kitchens where the hood is not directly on show.

Mechanical Slider
Effortless control. This Whirlpool Hood features a slider controller, providing effortless control of your appliance.

Booster
Odour-free cooking. This Whirlpool Hood features an extraction booster, that ensures ideal air filtration and odour and grease aspiration.

AKR 650/1 IX

12NC: 859991551210

GTIN (EAN) code: 8003437236563


Whirlpool
SENSING THE DIFFERENCE

MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Stainless steel
Colour chimney	N/A
Material chimney	N/A
Typology	Built-in/Built-under
Installation type	Built-in
Type of control	Mechanical
Type of control settings	-
Decor panel options	N/A
Motor location	Integrated motor in hood body
Operating Mode	Convertible
Electrical connection rating (W)	210
Current (A)	1
Voltage (V)	220-240
Frequency (Hz)	50
Length of Electrical Supply Cord (cm)	150
Plug type	Schuko
Chimney height (mm)	-
Height of product, without chimney (mm)	0
Height of the product	243
Width of the product	524
Depth of the product	289
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	6.5

TECHNICAL FEATURES

Type of manual control devices	Slider
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	200
Number of speed settings: boost option availability	4
Boost presence	Yes
Maximum output air extraction (m^3/h)	600
Boost position air extraction (m^3/h)	0
Maximum output recirculating air (m^3/h)	363
Boost position output recirculating (m^3/h)	0
Light Control Type	On/Off
Number of lights	2
Type of lamps used	LED
Total power of the lamps (W)	10
Diameter of air outlet (mm)	150
No-return airflow flap	No
Grease filter material	Washable aluminium
Odour filter	No

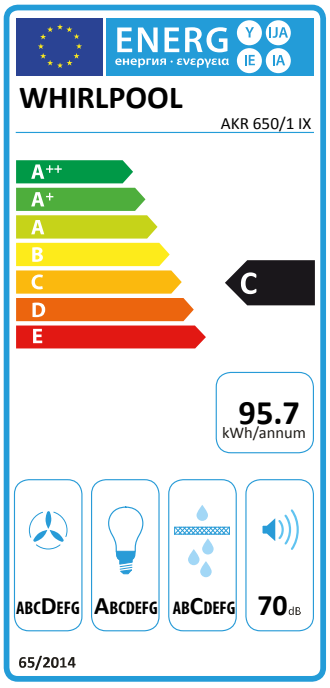

PERFORMANCES

Sound power at min. speed (2010/30/EU)	46
Sound power at max. speed (2010/30/EU)	70
Noise level with boost position (dB(A) re 1 pW)	0