
allure by eSTUFF

Product Manual

15-in-1 Triple Display Multifunction USB-C Dock

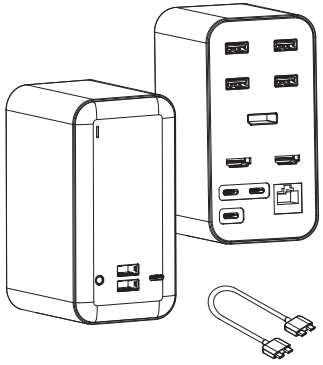

ENGLISH


Imported into the EU by EET Group A/S
Tempovej 41, 2750 Ballerup, Denmark

ES623011

Product Introduction

This USB-C Dock is a one-stop upgrade for Type-C laptops, including MacBook Pro. With this dock you add 13 extra ports of connectivity to your laptop. When using the included dual USB-C cable on your MacBook Pro, you will be able to utilize the multi-stream dual or triple display on the MacOS system. When using the included single USB-C cable, the dock also works perfectly with other types of USB-C laptops for dual or triple display.

Structure Diagram

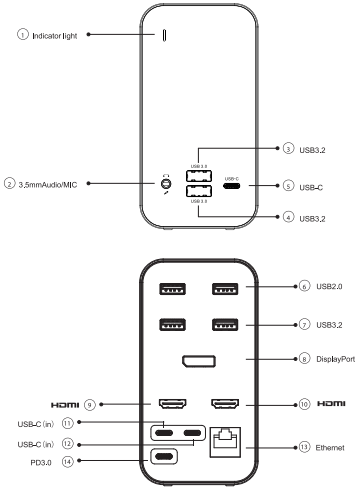


Specifications/features

1. Working indicator light
2. 3.5mm Audio/Microphone
3. USB 3. 2 Gen1 - 5Gb/s, 5V/0.9A@4.5W
4. USB 3. 2 Gen1 - 5Gb/s, 5V/0.9A@4.5W
5. USB-C 3.2 Gen1 - 5Gb/s, 5V/0.9A@4.5W
6. USB 2.0 - 480Mbps, 5V/0.5A@2.5W
7. USB 3. 2 Gen1 - 5Gb/s, 5V/0.9A@4.5W
8. DisplayPort - 4K @60Hz on DP 1.4
9. HDMI 1 - 4K @60Hz
10. HDMI 2 - 4K @60Hz on DP 1.4
11. USB-C 3.2 Gen1 - Host Connect ion
12. USB-C 3.2 Gen1 - Host Connection
13. Ethernet - Speed up 1 Gbps
14. PD 3.0 - Support 100W power adapter, max 87W charging for safety

In the box

1 x Hub
1 x Dual plug USB-C Cable
1 x Single plug USB-C Cable
1 x Product manual

Connection

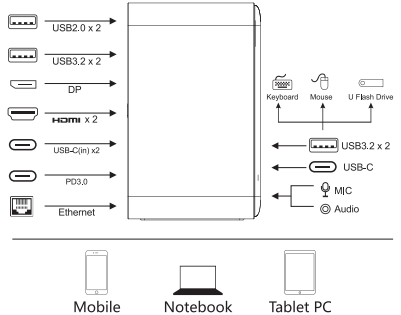

Tips

1. Multi-Stream Display on MacOS system is available if you connect the original dual USB-C cable to port ⑪ and port ⑫ simultaneously.
2. If you connect the single USB-C cable to port ⑪ then there will only be video on HDMI 1⑨.
3. If you connect the singe USB-C cable to port ⑫ HDMI 1 ⑨ will not work , all other ports are available.
4. For dual monitor performance on the single USB-C cable use DisplayPort ⑧ and HDMI 2 ⑩.
5. To ensure stable performance of the dock, we recommend to use a 60W PD charger or higher.

FAQ

a. Why is there no video output?

1. Please check that all cables are properly connected.
2. Please use standard HDMI and/or DP cables.

b. Why is there no audio output from HDMI port?

1. Please make sure that the monitor has audio output.
2. Please set the external monitor as default audio output device.

Computers supporting DP1.4	Remark
MacBook Pro 2018（15.4"）	Whether a computer supports DP1.4 signal output depends on the specifications and the graphics card. This hub only supports 4K @60Hz for computers with this specification. Please note that DP1.2 signal output only supports 4K @30Hz. Check your computers specifications for DP1.4 or DP1.2 support
MacBook Pro2019（15.4"）	
MacBook Pro2019（16"）	
iPad Pro 2018/2020	
Surface Laptop 3	
Surface Pro 7	
HP ENVY X360	
HP EliteBook 745 G5	
and many more...	

Made in China

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.