Key **Features**

Integrated USB Multimedia Player | Hospitality Mode | Control Multiple Devices | Reliable 16/7 Operation | Free Bundled VController™ Software



Product **Description**

The ViewSonic® CDE3205 is a great value, high performance 32" (31.5" viewable) Full HD LED commercial display for hotel, restaurant and hospitality environments. In addition to versatile connectivity options, including HDMI, DVI, VGA, DVI and YPbPr, the display comes with simple and convenient USB multimedia playback functionality. With 1920 x 1080 resolution, 350-nit brightness, wide viewing angles and dual 10W stereo speakers, the slim-bezel CDE3205 delivers vivid images and remarkable sound for superior multimedia performance. The HDMI-CEC pass-through support provides one-touch-play, with additional features for multiple connected devices such as HD set-top-boxes, media players, and Blu-ray™ players. An RS232 port with IR pass-through provides automated control for hospitality installation. For a more comfortable viewing experience, the display is equipped with Flicker-Free and Blue Light Filter technologies. In addition, free-bundled vController software offers easy maintenance and intuitive interfaces for remote management via a PC server or laptop.

Optional stand (STND-048) sold separately..

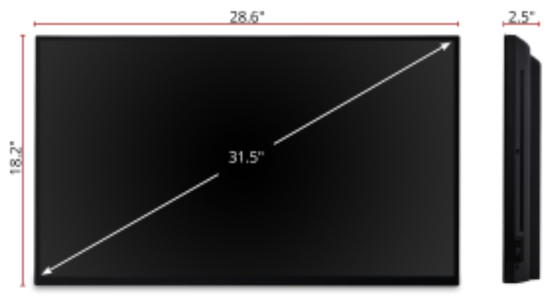

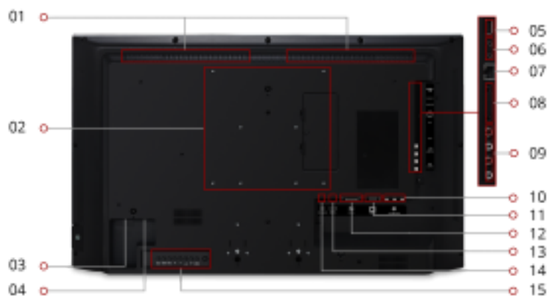

1. Internal Speakers
2. VESA® Compatible Wall Mount 200 x 200 mm
3. AC In
4. Power Switch
5. USB 2.0 Type A
6. RS232 In/Out
7. Ethernet Lan (RJ45)
8. IR In/Out
9. Audio In/Out
10. YPbPr In
11. VGA
12. DVI in
13. HDMI 1.4
14. PC Line In
15. Menu Controls

32" **DISPLAY**

1920 x 1080 **RESOLUTION**

350 cd/m2 **BRIGHTNESS**

16/7

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	32
Viewable Area (in.):	31.5
Light Source:	WLED
Resolution:	1920 x 1080
Panel Type:	IPS
Aspect Ratio:	16:9
Static Contrast Ratio:	1,200:1
Backlight Life (Hours):	30,000
Brightness:	350 cd/m2
Response Time (Typical GTG):	8ms
Viewing Angles:	178º horizontal, 178º vertical
Panel Surface:	Anti-glare, Hard coating (3H)
Operation Rating:	16/7

Embedded Player:

Media Player Type:	Yes

Audio:

Internal Speakers:	10W (x2)

Compatibility:

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080

Connector:

HDMI 1.4 In(1), DVI-D(1), VGA(1), YPbPr(1), Composite RCA(1), 3.5mm Audio In(1), USB 2.0(1), RS232(1), RS232 Out(1), Ethernet LAN (RJ45)(1), IR in(1), IR out(1)

Power:

Voltage:	AC 100-240V (universal), 50-60Hz
Consumption (max):	81W
Consumption (typical):	57W
Stand-by:	<0.5W
Power Supply:	Internal

Controls:

Physical Controls:	POWER, MUTE, INPUT, VOL -/+, UP, DOWN, MENU
On Screen Display:	Picture style, Restore style, Backlight, Contrast, Brightness, Hue, Colour, Sharpness, Advanced, Video or PC, Format and edges, Sound style, Restore style, Bass, Treble, Audio out, Advanced Menu Language, Monitor id, Eco mode, Auto search, Clock, Scheduling, Sleep timer, Auto switch off, pixel shift, Control setings Factory settings View network settings, Network configuration, Static IP configuration, Digital Media Renderer – DMR, Network name

Operating Conditions:

Temperature:	41-104º F (5 - 40º C)
Humidity (non-condensing):	20-80%

Weight (imperial):

Net (lbs):	14.7
Net Without Stand (lbs):	11.5
Gross (lbs):	17.2

Weight (metric):

Net (kg):	6.7
Net Without Stand (kg):	5.2
Gross (kg):	7.8

Dimensions (imperial) (WxHxD):

Packaging (in.):	32.2 x 21.5 x 5.5
Physical (in.):	28.6 x 18.2 x 9.4
Physical Without Stand (in.):	28.6 x 16.8 x 2.5

Dimensions (metric) (WxHxD):

Packaging (mm):	818.0 x 547.0 x 139.0
Physical (mm):	727.0 x 463.0 x 240.0
Physical Without Stand (mm):	727.0 x 425.0 x 64.0

Mount:

VESA Compatible:	100 x 100 / 200 x 200
Screw Size:	M4
Screw Length (mm):	8

Additional Hardware:

Kensington Lock Slot:	1

General:

Warranty: Three-year limited warranty on parts, labor and backlight

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: CDE3205, Remote Control with batteries, User manual CD wizard, Quick Start Guide, Power Cables, VGA cable, RS232 cable, RS232 daisy chain cable (2.4mm – 2.4mm), IR sensor cable

Regulations: cTUVus, FCC, Energy Star 7.0, Mexico Energy, CE, CB, ErP, EEL, WEEE

UPC: 766907005288

Accessories:

NMP520-W, NMP520-WX, NMP620-P10, STND-048, WMK-013, WMK-050

Copyright © ViewSonic Corporation 2000-2021. All rights reserved. (10/20/2021 03:38 PM PST)