
OVERVIEW

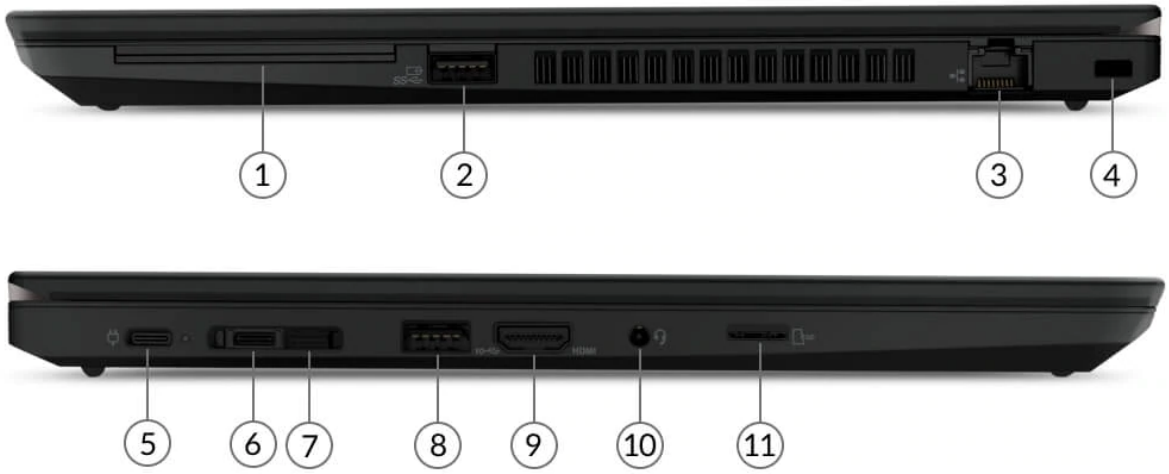

1. Smart card reader *	7. Side docking connector
2. USB 3.2 Gen 1 (Always On)	8. USB 3.2 Gen 1
3. Ethernet (RJ-45)	9. HDMI 2.0
4. Kensington Security Slot	10. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	11. MicroSD card reader
6. USB-C 3.2 Gen 2	

Notes:

- Ports with * are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)
- The combination of 5, 6 and 7 is side docking connector

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 7 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 7 PRO 4750U	8	16	1.7GHz	4.1GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics

Operating System

Operating System**

- Windows® 10 Pro 64
- Windows 10 Home 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)
- No operating system

Graphics

Graphics

Graphics	Type	Memory	Key Features
AMD Radeon Graphics	Integrated	Shared	DirectX® 12

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C)
• HDMI supports up to 4096x2160@60Hz
• USB-C supports up to 5120x2880@60Hz, DP mode via USB-C to DP dongle

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory[1]

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200 non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support[1]

One drive, up to 1TB M.2 2280 SSD

Storage Type**[2]

Disk Type	Interface	RPM	Security
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-	-

M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal2

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. M.2 2242 is special bid only

Removable Storage

Card Reader

MicroSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

Dual array microphone, near-field

Camera**

- 720p, with ThinkShutter, fixed focus
- IR & 720p hybrid, with ThinkShutter, fixed focus

Battery

Battery

Integrated Li-Polymer 50Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life[1]

MobileMark® 2014: 13.25 hr.
MobileMark 2018: 10.5 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**[1]

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
14.0"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14.0"	FHD	None	IPS	400 nits	Anti-	16:9	800:1	72%	170°	Low power

	(1920x1080)				glare			NTSC		
14.0"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14.0"	FHD (1920x1080)	Multi-touch	IPS	500 nits	Anti-glare	16:9	1000:1	72% NTSC	170°	ThinkPad® Privacy Guard

Touchscreen

- On-cell touch, supports 10-point touch (FHD models only)
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
   In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product.
   For more information, go to https://www.calrecycle.ca.gov/Electronics/Consumer

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical[1]

Dimensions (WxDxH)

329 x 227 x 17.9 mm (12.95 x 8.94 x 0.70 inches)

Weight

Models	Weight
FHD Low Power / Privacy Guard models	1.46 kg (3.22 lbs)
HD / FHD non-touch models	1.55 kg (3.41 lbs)

Case Color

Black

Case Material

PPS / 50% GF (top), PA / 50% GF (bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Realtek RTL8111EPV, supports Wake-on-LAN

WLAN + Bluetooth®[**][1]

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Mediatek Wi-Fi 6 MT7921, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Realtek RTL8852AE, Wi-Fi 6, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2
- Intel® Wi-Fi 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- No WLAN and Bluetooth

WWAN[**]

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE-A, CAT9, Fibocom L850-GL, M.2 card
- No support

SIM Card

- Gemalto eSIM
- No SIM card inbox

NFC

No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at lower version due to OS limitation

Ports[1]

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 2x USB-C 3.2 Gen 2 (support data transfer, Power Delivery and DisplayPort™)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Side docking connector

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
   USB 2.0: 480 Mbit/s;
   USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
   USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
   USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
   Thunderbolt™ 3/4: 40 Gbit/s;
   FireWire 400: 400 Mbit/s;
   FireWire 800: 800 Mbit/s

Docking

Docking

Various docking solutions supported via side docking connector, Thunderbolt or USB-C.
For more compatible docking solutions, please visit
Docking for ThinkPad P14s Gen 1 (AMD)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- Hard disk password
- Self-healing BIOS

Other Security

- (Optional) ThinkShutter camera cover
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management

AMD Pro Manageability

SERVICE

Warranty

Base Warranty[**[1]]

- 1-year depot service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service

Notes:

1. More information of warranty policy, please access https://pcsupport.lenovo.com/warranty

ENVIRONMENTAL

Operating Environment

Temperature[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810G military test passed

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



