

LogiLink®

4K 1x2 HDMI™ Splitter

Downscale, 4K/60 Hz

Art. No.: **HD0032**


This 4K HDMI Splitter with HDCP 2.2 is an advanced solution for splitting a single HDMI input to two HDMI outputs. It provides high performance audio and video output up to Ultra HD 4K@60 Hz resolution and delivers up to 18 Gbps of bandwidth, ensuring the best 4K picture quality.

Features:

» Connects one HDMI source to two HDMI displays at the same time
» Resolution up to UHD 4K@60 Hz (YUV 4:4:4) and Full 3D
» Bandwidth: 6 Gbps/600 MHz per Channel (18 Gbps total)
» Supports HDCP 2.2 (internal HDCP Key)
» Supports DDC, HDR, CEC and Downscale function
» Supports 12bit per channel (36bit all channels) deep color
» Supports uncompressed audio such as LPCM
» Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)



ⓐ Power LED
ⓑ HDMI input port
ⓒ Power ON/OFF switch
ⓓ HDMI output 1 & 2 port
ⓔ HDMI output 1 & 2 LED indicator
ⓕ USB DC 5 V input

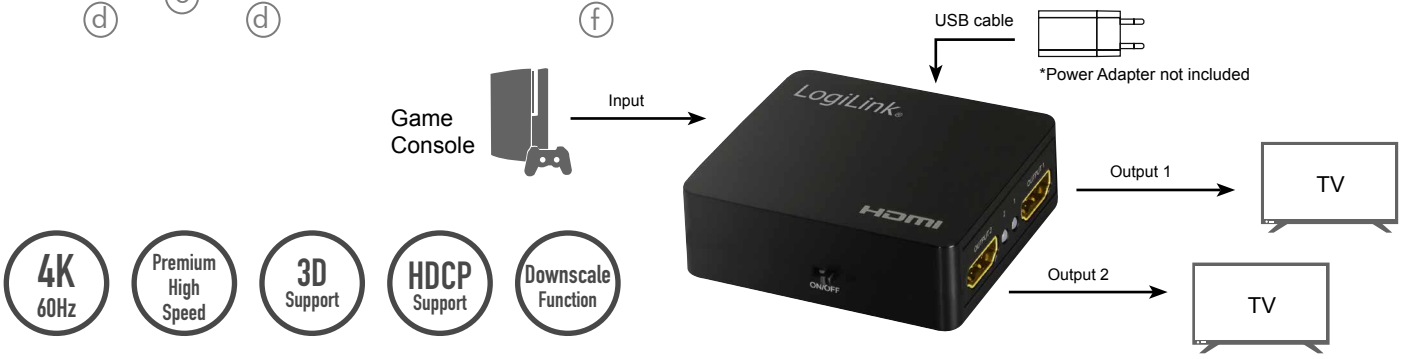

Compose Downscaler: Get lowest audio format of the outputs, and compose downscale of video. Downscale function means the product can downscale the input 4K resolution to 1080p by the FHD (1080p) displays and 4K resolution to the 4K displays simultaneously.

RoHS compliant CE

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Specifications:

Input Port	1x HDMI-A female
Output Ports	2x HDMI-A female
HDMI Version	2.0
HDCP Version	2.2
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50z,720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz 4:4:4
Video Bandwith	6 Gbps/600 MHz
CEC (Consumer Electronics Control)	Yes
HDR (High-Dynamic Range)	Yes
DDC (Display Data Channel)	Yes
LED Indicator	Yes
Chassis Material	ABS
3D Supporting	Yes
Power Consumption	5 W max.
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS, Dolby Digital,DTS-HD Master Audio™, Dolby TrueHD
Operating Temperature	0°C–70°C
Operating Humidity	10%–85% RH (no condensation)
Storage Temperature	-10°C–80°C
Storage Humidity	5%–90% RH (no condensation)
Dimensions	6x5.4x2 cm
Weight	0.042 kg

Package Contents:

» 1x 4K 1x2 HDMI Splitter
» 1x USB Charging Cable
» 1x User Manual

Package Information:

» Packing Dimension: 160x107x50 mm
» Packing Weight: 0.14 kg
» Carton Dimension: 575x255x345 mm
» Carton Q'ty: 40 pcs
» Carton Weight: 6.3 kg

RoHS compliant CE

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

HD0032
4 052792 050844
Made in China