# Instructions

3M

## 2184 Aerial Hanger Kit


Issue 1, October 1990
34-7029-1308-7

## 1.0 General

The 3M Brand 2184 Aerial Hanger Kit is used with the 3M Brand 2178 Fiber Optic Splice Case for aerial applications using single or double butt adapters. Hardware for installation is included with the kit.


## 2.0 Grounding

2.01 If grounding is required, use a length of bond braid to connect the aerial hanger to either ground stud on the splice case. Secure the bond braid under the head of the hanger screw and lock washer before the aerial hanger is installed on the splice case.

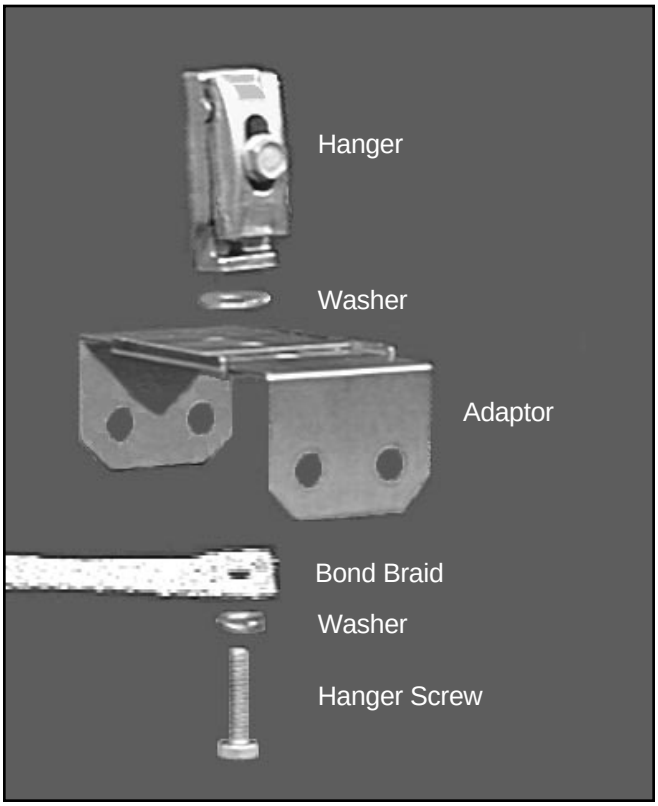


## 3.0 Aerial Hanger Bracket Installation

3.01 Install aerial hanger brackets on the 2178 Fiber Optic Splice Case.

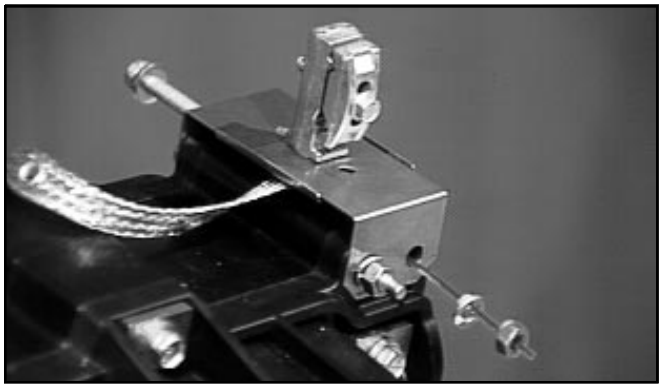


Single Adaptor



Double Adaptor


## 4.0 Hanger Bracket

4.01 Different sized strand may be accommodated when securing hanger bracket by rotating the notched caps.

4.02 Secure closure to strand using the proper position at the bottom of the external bonding/hanger bracket. (Strand is always placed in the lower position of bracket).

4.03 Tighten bolt in external bonding/hanger bracket to approximately 100 inch pounds (115 cm • kg) to secure hanger.





**Important Notice**

All statements, technical information and recommendations related to the Seller's products are based on information believed to be reliable, but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use.

Any statements or recommendations of the Seller which are not contained in the Seller's current publications shall have no force or effect unless contained in an agreement signed by an authorized officer of the Seller. The statements contained herein are made in lieu of all warranties, express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose which warranties are hereby expressly disclaimed.

SELLER SHALL NOT BE LIABLE TO THE USER OR ANY OTHER PERSON UNDER ANY LEGAL THEORY, INCLUDING BUT NOT LIMITED TO NEGLIGENCE OR STRICT LIABILITY, FOR ANY INJURY OR FOR ANY DIRECT OR CONSEQUENTIAL DAMAGES SUSTAINED OR INCURRED BY REASON OF THE USE OF ANY OF THE SELLER'S PRODUCTS THAT WERE DEFECTIVE.

© 1990 3M

Litho in U.S.A.

34-7029-1308-7

**3M TelComm Products Division**

PO Box 2963
Austin, TX 78769-2963