Lechange

Quick Start Guide

Version 1.0.0



1.2.51.32.13.181-000

Packing List



Device*1



QSG*1



Power Adapter*1



Quick Installation Board*1



Installation Position Map*1



Screw Package*1



USB*1

Product Appearance

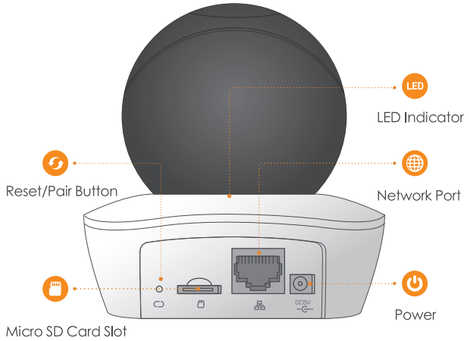

Note:
To reset, long press for 10 seconds till the light is off; to pair, just press the button.





The following table shows more information about status of indicator light

Indicator Light Status	Device Status
Spinning red	• Booting • Device malfunction • Failed to boot up
Spinning green	• Booting completed • Waiting for Wi-Fi configuration
Flashing yellow	• WiFi connection process. • Device has been configured with WiFi, but it failed to work normally.
Flashing green	Pairing with alarm sensor.
Blue light stably on	• Wi-Fi connection succeeded • Operate normally
Flashing blue	Device upgrade
Flashing red	• SD card malfunction. • Pairing failed.

Disclaimer

- This quick start guide is for reference only. Minor difference might be found inuser interface.
- All the design and software here are subject to change without prior writtennotice.
- All trademarks and registered trademarks mentioned are the properties of their respective owners.
- Please visit our website or contact your local service engineer for more information.
- If there is any uncertainty or controversy,please refer to our final explanation.

Operation by Lechange App

Step 1
Power on your camera with power adapter.

Step 2
Connect your smartphone to your Wi-Fi network, scan "Lechange" QR on the packing box, download and install Lechange App.

Step 3
Run Lechange App, and register account for first use.

Step 4
Follow the steps below to add your camera .



Note:
–If you have more cameras, please follow step 4 to add them one by one.
–If you want to change the Wi–Fi signal, please reset the camera to factory default and repeat step 4 to add the camera.

Add Alarm Sensor

Note:
– The alarm sensor is not included by default; you need to purchase it separately if necessary.
– There are two ways to add alarm sensor.

Method 1
Step1 Press camera Reset/Pair button for 2s to enter pairing mode, and then the green light flashes.

Step2 Press the pair button of alarm sensor and the indicator light will flash quickly and continuously.

Step3 The green light of camera will stop flashing if pairing succeeds; the red light will flash for 10s and then disappear if pairing fails.

Method 2
Scan the QR code on the device with Lechange app, and then follow app guide to operate.

Device Installation

Note:
Before installation, please make sure the installation environments can at least support 3x weight of the device.



To install the device, do the following.

Step1 Drill holes on the wall and install the expansion bolts into the drilled holes.

Step2 Fix the installation board with screws onto the wall.

Step3 Spin the device to get locked onto the installation board.