

Scout Motion Detector

Scout Motion Detector is shaped to be placed on a shelf, adhered to a wall, or fit in the corner to protect what you care. It detects break-ins with PIR sensor; the detection range is 12m(39.4ft) and field of view is 90°. You'll get an instant alert message on Lechange App When someone breaks in.

Specifications

Sensor


Detection: Passive infrared
Detection Range: 12m (39.4ft)/90°
Alarm Prompt: Notification LED indicator
Sensitivity: Two levels (jumper switch)
Pet Immunity: ⩽18Kg (39.7lb)

Wireless

Wireless Frequencies: 433MHz/868MHz/915MHz
Transmit Power: 10dBm
Transmit Distance: 150m (492.1ft) open area

General

Tamper: Unit protection and leaving wall protection
Power: 1x CR123A battery, 3 years battery life
Working Environment: -10℃~+50℃(14℉~122℉), less than 95%RH
Resistance Light: 6500lux
Mount Requirement: Wall mount, 2.2~2.5m (7.2~8.2 ft) installation height
Dimension: 105 × 62 × 41.3mm (3.1 × 2.4 × 1.6inch)
Weight: 0.1Kg (0.2lb)
Certification: CE, FCC

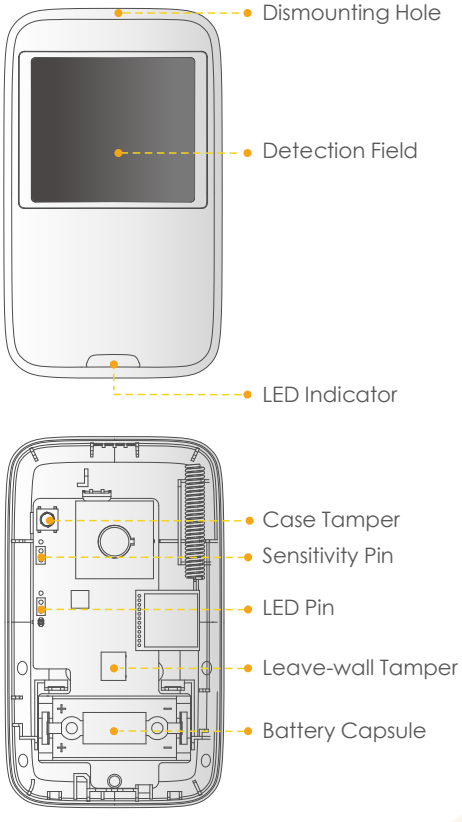

What's in the box

- 1x Motion Detector
- 1x CR123A Battery
- 1x QSG

