

Halogen High Voltage SE (Theater)

6874P 300W GY9.5 230V 1CT/10

Two distinctive features make this lamp ideal for use in theater luminaires where long life is essential. Firstly, the filament is especially designed for extended lifetime. Secondly the highly innovative P3 technology, developed by Philips, allows the pinch to better withstand extreme heat conditions which extends the average lamp lifetime, ensures consistent high-quality light output over time, and results in fewer early failures and fewer maintenance man hour costs.

Product data

• General Information

Cap base	GY9.5
Philips code	6874P
ANSI Code	-
Operating position	UNIVERSAL [Any or Universal (U)]
Main application	Entertainment
Life to 50% failures (nom.)	2000 h
System description	na [-]

• Light Technical

Luminous flux (rated) (nom.)	5100 lm
Correlated colour temperature (nom.)	2950 K

• Operating and Electrical

Power (Rated) (Nom)	300 W
Rapid-acting HBC fuse	2 V
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb finish	Clear (CL)
Filament shape	M
Filament dimensions WxH	8x14
Dimensions (height x width x depth)	NaN x NaN x NaN mm (NaN x NaN x NaN in)

• Luminaire Design Requirements

Pinch temperature (max.)	400 °C


• Product Data

Full product code	871150018779625
Order product name	6874P 300W GY9.5 230V 1CT/10
EAN/UPC – product	8711500187796
Order code	18779625
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	923949743228
Net weight (piece)	0.018 kg


PHILIPS

Halogen High Voltage SE (Theater)

Dimensional drawing

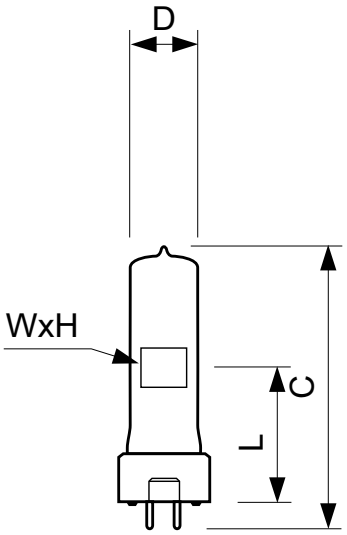

GY9.5



6874P 300W GY9.5 230V

Product	D	H	W	L	C
6874P 300W GY9.5 230V 1CT/10	18 mm	14 mm	8 mm	46.5 mm	80 mm

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, May 28
data subject to change