Backup Intelligent LCD Series

CP1350EAVRLCD

ILCDD0015EU-00

Best-In-Class Power Protection for SMEs

CyberPower®
Reliability. Quality. Value.

Designed for small office/SOHO computers and home entertainment systems, the CyberPower Intelligent LCD Series features “Best-In-Class” power protection with Automatic Voltage Regulator (AVR) line conditioning to maintain safe power levels for connected equipment without resorting to battery power. The full protection of RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges and spikes. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition.

The included PowerPanel® Personal Edition management software showcases the featured rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time. With the patented GreenPower UPS™ Technology offers clean and stable battery backup, Intelligent LCD Series can save up to 75% of electricity therefore save your electricity expenses.




Applications


- Home and Home Office
- Home Theater System
- Small Office
- Medium Business

Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel® Personal Edition Software

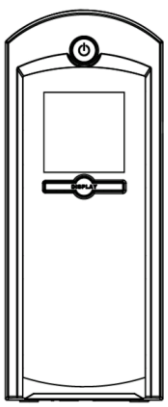

Front

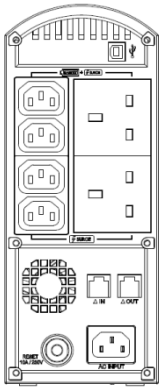

Back

Energy-Saving | AVR | Surge Protection
Phone Line Protection | LCD Display | USB & Serial

ENERGY-SAVING TECHNOLOGY

ENERGY-SAVING TECHNOLOGY

GreenPower UPS™ Technology

The patented advanced energy-saving technology improves the UPS operating efficiency and eliminates waste energy consumption.

POWERPANEL® PERSONAL EDITION S/W



Auto-shutdown Software

Compatible with Windows 8, Windows 7, Vista, XP; Windows Server 2012, 2008, 2003. Software compatible with Mac and Linux is available for download from our website.

**Software functions may vary due to firmware version and/or hardware constraints.*

® CyberPower Systems Inc. All Rights Reserved.

Backup Intelligent LCD Series

CP1350EAVRLCD

Technical Specification

CyberPower®
Reliability. Quality. Value.

Model Name	CP1350EAVRLCD	CP1500EAVRLCD
General		
UPS Topology	Line-Interactive	
Energy Saving	Yes	
Energy Star Qualified	(by request)	
Input		
Voltage	230Vac	
Input Voltage Range	165Vac - 265Vac	
Input Frequency Range	50/60Hz ± 3Hz (Auto-sensing)	
Rated Input current	10A	
Plug Type	Schuko or UK	
Output		
VA	1350	1500
Watts	810	900
On Battery Waveform	Simulated Sine Wave	
On Battery Voltage	230Vac ± 10%	
Automatic Voltage Regulation (AVR)	Single Boost	
On Battery Frequency	50/60Hz ± 1%	
Outlets - Total	6	
Outlet Type	UK (UK x 2 + IEC x 4)	
Outlets - Battery & Surge Protected	3	
Outlets - Surge-Only Protected	3	
Transfer Time	4ms	
Battery		
Runtime at Half Load (min)	10	11
Runtime at Full Load (min)	2	3
Battery Type	Sealed Lead Acid	
Battery Quantity	2	
User Replaceable	Yes	
Typical Recharge Time	8 Hours	
Replacement Battery Pack	RBP0064	RBP0015
Replacement Battery Pack Quantity	1	
Surge Protection & Filtering		
Surge Suppression	1215 Joules	
Phone / Network Protection RJ11/RJ45	1-In, 1-Out (Combo)	
Management & Communications		
LCD Control Panel	Yes	
HID Compliant USB Port	Yes	
LED Indicators	Power On, Wiring Fault	
Audible Alarms	On Battery, Low Battery, Overload, Fault	
Software	PowerPanel® Personal Edition	
Physical		
Form Factor	Tower	
Physical - UPS Module		
Dimensions (WxHxD) (mm.)	100 x 249 x 371	
Weight (kg.)	11.5	12.1
Environmental		
Operating Temperature	+ 32°F to 104° F / 0° C to 40° C	
Operating Humidity	0% - 90% non-condensing	
Operating Elevation	0-10000 feet (0-3000 meters)	
Storage Temperature	5 °F to 113°F / -15°C to 45 °C	
Storage Relative Humidity	0 - 95%	
Online Thermal Dissipation	50 BTU/hr	65 BTU/hr

#All specifications are subject to change without notice. ©2015 CyberPower Systems. All Trademarks are the property of their owners.

AVR AUTOMATIC VOLTAGE REGULATOR

CONNECTED EQUIPMENT € 50,000 LIFETIME GUARANTEE

ENERGY-SAVING TECHNOLOGY

RoHS

АИ 30

CE

DISTRIBUTED BY:

CyberPower's Manufacturing Facilities are **ISO 9001:2000**, **ISO 14000,** and **QC080000** Approved

® CyberPower Systems Inc. All Rights Reserved.