Pricebook

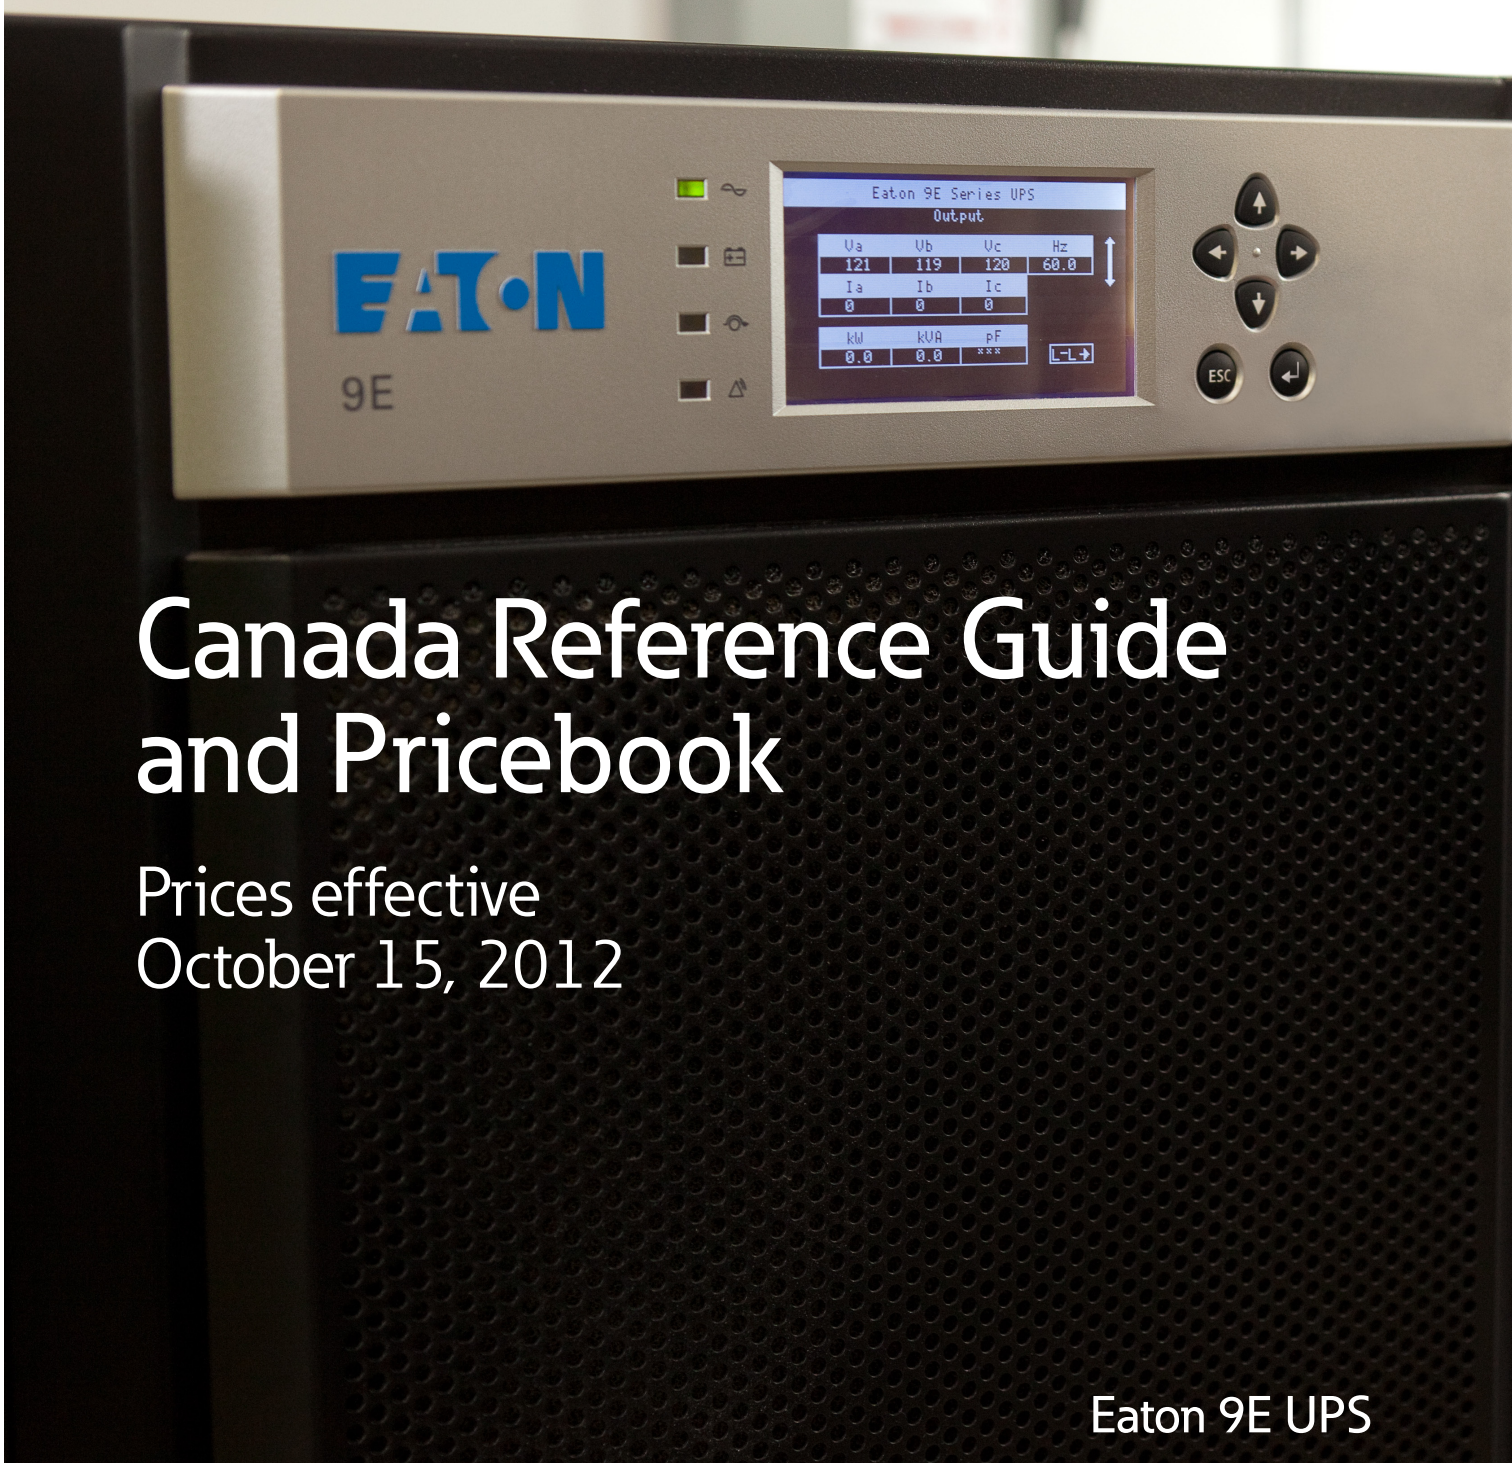

Canada Reference Guide and Pricebook

Prices effective October 15, 2012

Eaton 9E UPS

Powering Business Worldwide

Switch ON to Eaton.

EATON FERRUPS FE UPS 60 HZ

Powerware series *(continued)*

Ferroresonant UPS (4.3–18 kVA)

- Bulletproof power integrity and management for telecommunications and computer loads
- Power factor-corrected, switch-mode and linear power supplies

The FERRUPS can be customized with many options and runtimes. If you do not find the configuration you need in this price book, call 1-800-461-9166.



FERRUPS FE 60 Hz MODELS *(continued)*

Model Number	CTO Number	Input/Output Voltage	Runtimes Full/Half Load	Input Plug	Output Receptacles	Cdn List Price
Model FE4.3 (4.3 kVA/3 kW)						
FE4.3 kVA	FI000AA0A0A0A0B	120V/120V	10/24 min	Hardwired	Hardwired	$9,216
FE4.3 kVA	FI100AA0A0A0A0B	208-208/120V	10/24 min	Hardwired	Hardwired	$8,924
FE4.3 kVA	FI300AA0A0A0A0B	240-240/120V	10/24 min	Hardwired	Hardwired	$8,924
Model FE5.3 (5.3 kVA/3.7 kW)						
FE5.3 kVA	FJ000AA0A0A0A0B	120V/120V	20/50 min	Hardwired	Hardwired	$10,561
FE5.3 kVA	FJ100AA0A0A0A0B	208-208/120V	20/50 min	Hardwired	Hardwired	$10,269
FE5.3 kVA	FJ300AA0A0A0A0B	240-240/120V	20/50 min	Hardwired	Hardwired	$10,269
Model FE7 (7 kVA/5 kW)						
FE7 kVA	FK000AA0A0A0A0B	120V/120V	12/33 min	Hardwired	Hardwired	$13,196
FE7 kVA	FK100AA0A0A0A0B	208-208/120V	12/33 min	Hardwired	Hardwired	$12,904
FE7 kVA	FK300AA0A0A0A0B	240-240/120V	12/33 min	Hardwired	Hardwired	$12,904
Model FE10 (10 kVA/7.5 kW)						
FE10 kVA	FL140AA0A0A0A0B	208-208/120V	External	Hardwired	Hardwired	$13,822
Recommended system options:	EBPS10F	Standard external battery pack (11/26 min)				$4,868
	BPE04BBM1A	External maintenance bypass switch (break-before-make)				$1,085
System List						$19,774
FE10 kVA	FL340AA0A0A0A0B	240-240/120V	External	Hardwired	Hardwired	$13,822
Recommended system options:	EBPS10F	Standard external battery pack (11/26 min)				$4,868
	BPE04MBB1A	External maintenance bypass switch (make-before-break)				$1,190
System List						$19,879
Model FE12.5 (12.5 kVA/10 kW)						
FE12.5 kVA	FM140AA0A0A0A0B	208-208/120V	External	Hardwired	Hardwired	$14,758
Recommended system options:	EBPS12F	Standard external battery pack (18/48 min)				$6,718
	BPE04BBM1A	External maintenance bypass switch (break-before-make)				$1,085
System List						$22,561
FE12.5 kVA	FM340AA0A0A0A0B	240-240/120V	External	Hardwired	Hardwired	$14,758
Recommended system options:	EBPS12F	Standard external battery pack (18/48 min)				$6,718
	BPE04MBB1A	External maintenance bypass switch (make-before-break)				$1,190
System List						$22,666
Model FE18 (18 kVA/15 kW)						
FE18 kVA	FN140AA0A0A0A0B	208-208/120V	External	Hardwired	Hardwired	$18,985
Recommended system options:	EBPS18F	Standard external battery pack (10/26 min)				$6,718
	BPE05BBM1A	External maintenance bypass switch (break-before-make)				$1,337
System List						$27,040
FE18 kVA	FN340AA0A0A0A0B	240-240/120V	External	Hardwired	Hardwired	$18,985
Recommended system options:	EBPS18F	Standard external battery pack (10/26 min)				$6,718
	BPE05MBB1A	External maintenance bypass switch (make-before-break)				$1,500
System List						$27,203

Note: See following pages for external battery packs and maintenance bypass switches. Call for other configurations and options.

EATON FERRUPS UPS EXTERNAL OPTIONS & ACCESSORIES

Powerware series

FERRUPS EXTERNAL BATTERY PACK BACKUP TIMES (full/half load)

FERRUPS external battery packs offer extended backup times. Please see following pages for typical backup times. Use of the external battery packs require that the FERRUPS UPS be configured with external battery or battery charger options as noted below.

Tower: 1.4–3.1 kVA

Battery Pack	Cdn List Price	FE1.15 kVA	FE1.4 kVA	FE1.8 kVA	FE2.1 kVA	FE3.1 kVA
8ME	$3,254	3h 15m / 9h 11m	2h 20m / 6h 35m	-	-	-
9ME	$3,554	3h 50m / 10h 50m	3h 10m / 8h 57m	2h 12m / 4h 53m	1h 41m / 3h 54m	57m / 2h 27m
10ME	$6,110	6h 30m / 18h 23m	5h 20m / 15h 5m	3h 38m / 8h 22m	2h 50m / 6h 37m	1h 41m / 4h 03m
11ME	$6,769	-	-	5h 09m / 11h 30m	4h 03m / 9h 10m	2h 29m / 5h 44m
12ME[1]	$9,005	-	-	6h 07m / 14h 06m	4h 46m / 11h 08m	2h 52m / 6h 50m
13ME[1]	$10,995	-	-	8h 30m / 18h 53m	6h 42m / 15h 04m	4h 07m / 9h 27m
14ME[1]	$13,492	-	-	12h 08m / 27h 06m	9h 33m / 21h 36m	5h 52m / 13h 30m
15ME[1]	$18,247	-	-	18h 52m / 44h 45m	15h 12m / 36h 28m	9h 41m / 22h 18m

Tower: 4.3–7 kVA

Battery Pack	Cdn List Price	FE4.3 kVA	FE5.3 kVA	FE7 kVA
1FE	$4,390	40m / 1h 42m	27m / 1h 14m	-
2FE	$6,150	1h 11m / 2h 51m	49m / 2h 10m	34m / 1h 28m
3FE	$6,816	1h 49m / 4h 05m	1h 12m / 3h 08m	48m / 2h 13m
4FE[2]	$9,087	2h 06m / 4h 46m	1h 27m / 3h 39m	60m / 2h 33m
5FE[2]	$11,108	3h 04m / 6h 46m	2h 13m / 5h 11m	1h 32m / 3h 41m
6FE[3]	$13,370	4h 27m / 9h 39m	3h 08m / 7h 22m	2h 16m / 5h 14m
7FE[3]	$18,465	7h 12m / 15h 56m	5h 10m / 12h 10m	3h 45m / 8h 39m

Tower: 10–18 kVA

Battery Pack	Cdn List Price	FE10 kVA	FE12.5 kVA	Battery Pack	Cdn List Price	FE18 kVA
EBPS10F	$4,868	11m / 26 m	-	EBPS18F	$6,718	10m / 26m
EBPS12F	$6,718	-	18m / 48m	16FE	$8,804	14m / 39m
8FE	$6,758	27m / 1h 10m	-	17FE	$13,516	27m / 1h 10m
9FE	$8,908	41m / 1h 48m	27m / 1h 13m	18FE	$14,538	37m / 1h 46m
10FE	$13,565	1h 13m / 2h 59m	49m / 2h 07m	19FE[3]	$20,379	48m / 2h 04m
11FE	$15,042	1h 51m / 4h 16m	1h 12m / 3h 04m	20FE[3]	$25,507	1h 13m / 3h 01m
12FE[2]	$20,201	2h 09m / 5h 02m	1h 38m / 4h 05m	21FE[3]	$29,076	1h 49m / 4h 17m
13FE[2]	$25,760	3h 07m / 7h 04m	2h 12m / 5h 05m	22FE[3]	$43,476	3h 04m / 7h 05m
14FE[3]	$29,912	4h 26m / 10h 04m	3h 08m / 7h 14m			
15FE[3]	$43,452	7h 20m / 16h 38m	5h 10m / 11h 57m			

Rackmount: 2.1–7 kVA

Battery Pack	Cdn List Price	FER2.1 kVA	FER3.1 kVA	FER7 kVA
1RE	$4,213	1h 41m / 3h 54m	57m / 2h 27m	-
2RE	$7,312	2h 50m / 6h 37m	1h 41m / 4h 03m	-
EBPS4.3R	$4,139	-	-	12m / 33m

1. Requires FERRUPS UPS to be configured with optional 15 Amp battery charger.
2. Requires FERRUPS UPS to be configured with optional 10 Amp battery charger.
3. Requires FERRUPS UPS to be configured with optional 20 Amp battery charger.

Note: Backup times are approximate and vary with equipment, configuration, battery age, temperature etc.