

Halogen non-reflector

7158 150W G6.35 24V 1CT/10X10F

Low-voltage quartz halogen capsule lamps

Product data

• General Information

Cap base	G6.35 [G6.35]
Philips code	7158
ANSI Code	FCS
Operating position	S90 [Standing +/-90D or Base Down (BDH)]
Main application	Projection
Life to 50% failures (nom.)	50 h

• Light Technical

Luminous flux (rated) (nom.)	5200 lm
Correlated colour temperature (nom.)	3450 K
Color rendering index (nom.)	100

• Operating and Electrical

Power (Rated) (Nom)	150 W
Voltage (Nom)	24 V

• Mechanical and Housing

Bulb material	Quartz-UV Open
Filament shape	Flat
Filament dimensions WxH	5.8x2.9

• Luminaire Design Requirements

Bulb temperature (max.)	900 °C
Pinch temperature (max.)	400 °C

• Product Data

Full product code	871150040983650
Order product name	7158 150W G6.35 24V 1CT/10X10F
EAN/UPC – product	8711500409836
Order code	40983650
Local Code	A1216
Numerator – quantity per pack	1
Numerator – packs per outer box	100
Material no. (12NC)	923870520503
Net weight (piece)	0.004 kg

PHILIPS

Halogen non-reflector

Dimensional drawing

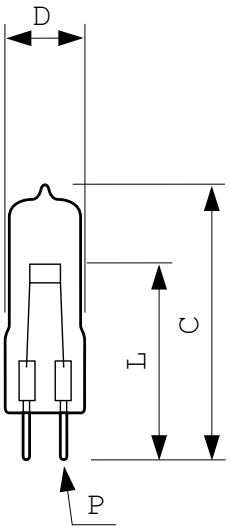

G6.35, GY6.35

7158 150W G6.35 24V

Product	D	L	L	L	P	P	P	C (max)
7158 150W G6.35 24V 1CT/10X10F	11.5 mm	31.5 mm	32.25 mm	32 mm	1.05 mm	1 mm	0.95 mm	





© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change