

Halogen Clickline G9

Halogen MV Click 18W G9 230V CL 1CT

Ideal solution for small decorative luminaires. UV-block glass and safety fuse allow usage without cover glass. The compact Clickline gives crisp white light over a long lifetime.

Product data

• General Information

Cap base	G9 [G9]
Bulb shape	T13 [T 13 mm]
Operating position	UNIVERSAL [Any or Universal (U)]
Nominal lifetime (nom.)	2000 h

• Light Technical

Luminous flux (nom.)	204 lm
Luminous flux (rated) (nom.)	204 lm
Correlated colour temperature (nom.)	2800 K
Luminous efficacy (rated) (nom.)	11.1 lm/W
Color rendering index (nom.)	100
LLMF at end of nominal lifetime (min.)	80 %

• Operating and Electrical

Power (Rated) (Nom)	18 W
Lamp current (nom.)	0.08 A
Wattage equivalent	25 W
Starting time (nom.)	0.0 s
Warm-up time to 60% light (nom.)	instant full light
Power factor (nom.)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb finish	Clear (CL)

• Approval and Application

Energy efficiency label (EEL)	D
Energy Consumption kWh/1000 h	18 kWh

• Luminaire Design Requirements

Bulb temperature (max.)	950 °C
Pinch temperature (max.)	350 °C

• Product Data

Full product code	872790089577300
Order product name	Halogen MV Click 18W G9 230V CL 1CT
EAN/UPC – product	8727900895773
Order code	89577300
Numerator – quantity per pack	1
Numerator – packs per outer box	100
Material no. (12NC)	925697744201
Net weight (piece)	3.300 g

PHILIPS

Halogen Clickline G9

Dimensional drawing

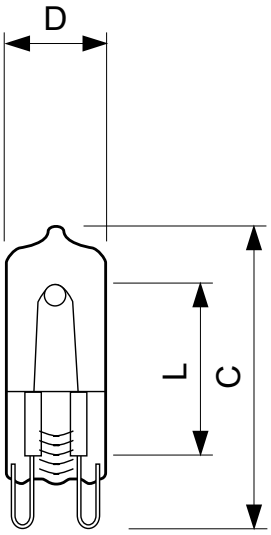

G9



CLICKLINE 18W G9 230V CL

Product	D	L	C
Halogen MV Click 18W G9 230V CL 1CT	13 mm	21.7 mm	45 mm

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 27
data subject to change