Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

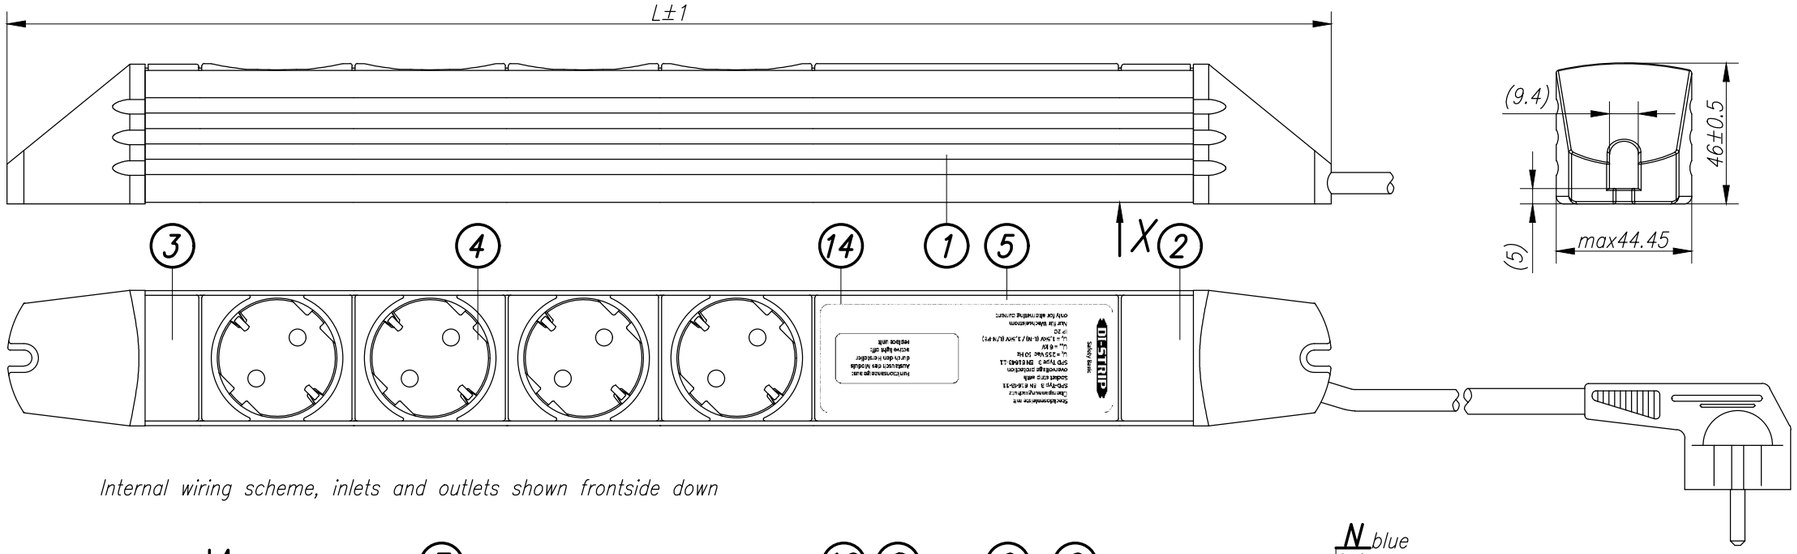

Internal wiring scheme, inlets and outlets shown frontside down

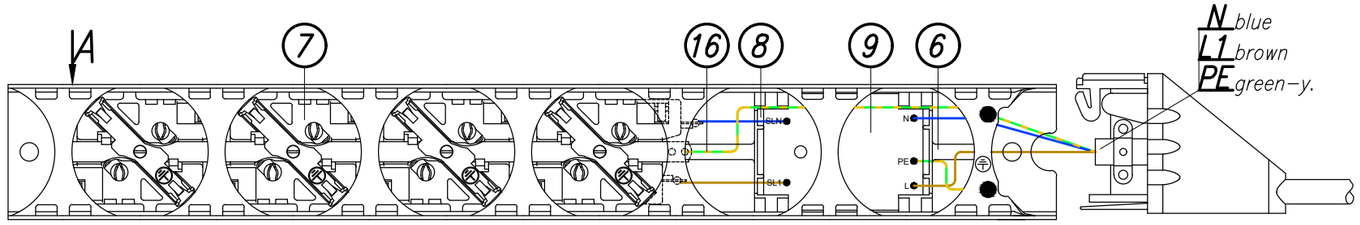

A view



X view

assembly dimensions (only for information purposes)

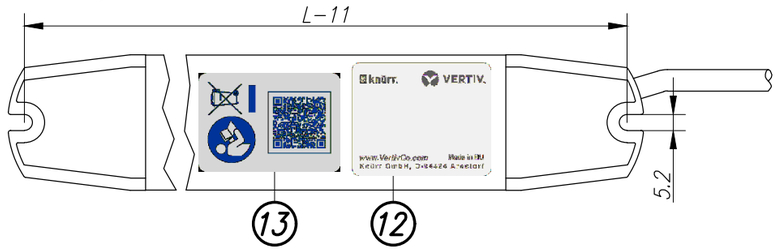

Example of label:



Type selection

Dawing no. Description	L (mm)	Color of chassis	No. of sockets	Gross weight (kg)	Net weight (kg)	External dimensions of packing box (mm)
03.316.110.1 DIS–EEV CEE7/7–16A 10P SB	732	RAL7035 light grey	10	1,40	1,25	680x60x75
03.316.106.1 DIS–EEV CEE7/7–16A 6P SB	532	RAL7035 light grey	6	1,11	0,97	480x60x80
03.316.104.1 DIS–EEV CEE7/7–16A 4P SB	432	RAL7035 light grey	4	0,95	0,83	480x60x80

16	1	ST	Vezeték zöld-sárga 1,5mm2	Electric cord green-yellow	3.768.2670	L=160(EO-EO)

A belső vezetékezés komponensei. / Components of internal wiring.

Technical data:
- *DIN 49440 SCHUKO socket 16A*
socket spacing 50mm, torsion of sockets 45°
- *with overvoltage protection module*
- *Operating temperature: 0 ... +50 °C*

Load rating:
240 Vac, 50–60 Hz
Input: 1x 16 A
Output: 16 A

Approvals/certificates:
- *CE marking according to: LVD (low voltage directive), RoHS (restriction of hazardous substances)*
- *BV–BG certification (factory inspected)*

Power cord:
Type: H05VV–F 3x1,5mm², white
Length: 2,5m
Plug: CEE VII/7, DIN49441 Form2

Material/Finish:
Chassis: closed sheet steel extrusion, zincplated, powder–coated texture
Plastic parts: Vampamid 6 0024 VO (UL94) or similar, recyclable
Internal conduction: brass conductor rails and copper wires
Internal copper wires: H07V–K 1,5mm²

Color:
Chassis:
Plastic parts: RAL7035 light grey

Packaging:
Packing box (csomagolódoboz)
Supply schedule:
Socket strip (1 piece)
User manual (1 piece) 03.300.999.1

Dimensions in mm

Rev.	Change	Date	Name
C	18027	07.08.17	Gali

	Date	Name
Drawn	28.04.2010	Kovács
Checked	28.04.2010	Szabó
Approved		

General tolerances: ISO 2768–m
Finish:
Material:
Sheet: 1/1
Description: DIS–EEV CEE7/7–16A SB
Drawing no.: 03.316.104.X–110.X
Scale:

knürr®
Knürr GmbH Mariakirchener Straße 38
D–94424 Arnstorf Tel: +49 (0) 87 23–27–0

Gross weight	Net weight	External dimensions of packing box
kg	kg	mm

Platine:
File:

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.