Mini Globe 3.4W (25W) 2700K 250lm E14 Non-Dimmable Frosted Lamp



Product Details

Partcode: ILP45E14O3.5N27KBCMA

Check Code: 433980

Range Name: Mensae

Placement / Application: Indoor, General Lighting

Product Type: Mini Globe

Warranty: 2 Years

CE / RoHS: Yes

Physical Data

Lamp Base: E14

Base Type: Small Edison screw

Base Colour: Matt white

Globe Type: Mini Globe

Globe Finish: Frosted

Material: Plastic, Polycarbonate, Nickel plated brass

Construction: Aluminium and Plastic heat-sink, Injection moulded diffuser

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Physical Data

Length: 80mm

Width: 45mm

Weight (Unpackaged Single Unit): 33g

Lamp or Luminaire Shape: Round

Electrical Data

Voltage Range: 220-240V

Power Consumption: 3.4 Watts

Driver included: Yes

Driver IC Manufacturer: Silergy

Electric Current: AC

Ampage: 42.00mA

Frequency Range: 50 Hz

Power Factor: >=0.50

Wattage Equivalent: 25 Watts

Dimming: Non-dimmable

LVD Certified: Yes

EN: EN-62560

Light Data

Lumens: 250lm

Lumens per Watt: 74.0lm/W

Beam Angle: 180º

Correlated Colour Temperature (CCT): 2,700k

Colour Temperature: Warm

Colour Rendering Index (CRI): >=80

LED Type: Surface mounted device (SMD)


Instant on - Less than 1 second: Yes

Lifetime: 15,000 hrs

Switching Cycles: >7,500 X

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Environmental

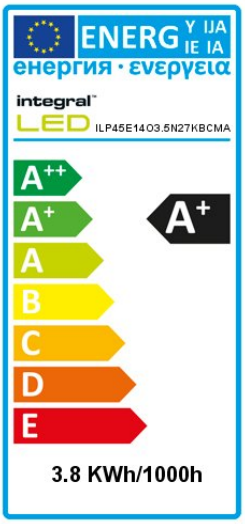

Energy Rating: A+

Lowest Operating Temperature: -20 degrees

Maximum Operating Temperature: 40 degrees

IP (Ingress Protection) Rating: IP20

Hg 0% (Mercury Free): Yes

Packaging



EAN Barcode (unit of 1): 5055788208723

Packaged Weight (Unit of 1): 57g

Length (unit of 1): 115mm

Width (unit of 1): 51mm

Depth (unit of 1): 51mm

Outer packaging info available on website

Product data last updated on: Friday, September 29, 2017 - 17:31

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE