Shielded flip jack Cat6 keystone

Item no.: LVN128149

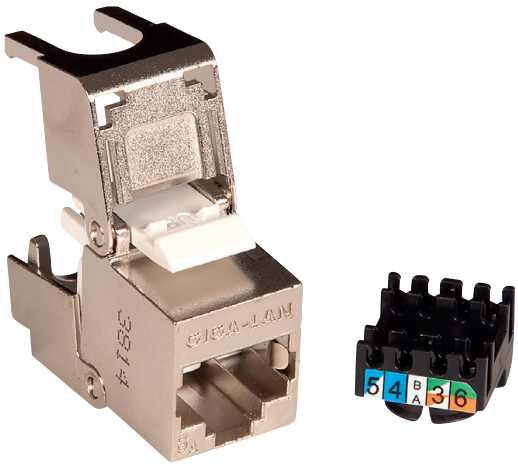

PRODUCT OVERVIEW

This Shielded Cat6 Keystone Jack for patch panels and other data installations allows for multiple cable entry directions to be accommodated when this jack is mounted in a standard depth back box. This permits many mounting options including flush shutters at the outlet as well as more common angled shutter used with keystone jacks.

Easy to install without need for special tools.

SPECIFICATIONS

Category	6 Shielded
Type	Keystone
Housing	Metal
Packaging	1pcs
Frequency	250Mhz
Protocol	1 Gbps Ethernet
POE+	100 Watt
Component Compliant	Yes
Industry standard compliance	ANSI/TIA-568-C2 Cat.6A



© 2021, Lanview®. All rights reserved.

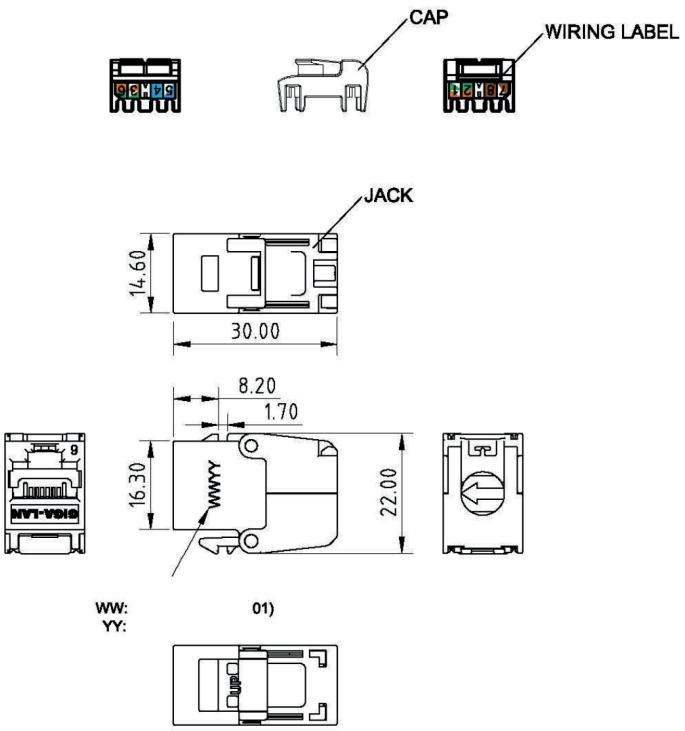

MECHANICAL

Insertion / Extraction Life	750 Cycles Minimum IDC
Wire Gauge	22 - 24 AWG

ELECTRICAL

Electrical Insulation Resistance	500 MO min. @ 1 00V d.c
Dielectric Withstanding Voltage	1 OOOV d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute.1500V d.c. or a.c. Peak Contact to Test panel @ 60Hz for 1 minute.

PHYSICAL

Housing	High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire	Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC	Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy

ITEM	PART NAME	QTY
4	Cable tie	1
3	Instruction	1
2	Cap include wiring label	1
1	Jack	1

Shielded flip jack Cat6 keystone

© 2021, Lanview®. All rights reserved.